ADAYO

T : +86-752-5300 980
+86-752-5300 979
+86-752-5300 977
+86-752-5300 601
F : +86-752-5300 099
E : info@adayoled.com
A : Foryou Industrial Park Area B,
No.1 North Shangxia Road,
Dongjiang Hi-tech industry Park,
Huizhou, Guangdong Province,P R China

HUIZHOU FORYOU OPTOELECTRONICS TECHNOLOGY CO., LTD.

adayo-led

adayoled



ADAYO

2022

PROFESSIONAL LED

LIGHTING PRODUCTS

CATALOGUE

www.adayoled.com

ADAYO

INDEX

■ COMMERCIAL

LED Spotlight

ROLAND	360° Rotatable recessed spotlight	011 - 014
JAMES	360° ECO Rotatable recessed spotlight	015 - 016
COREIN	Module recessed spotlight	017 - 020
MIRANDA	Deep recessed spotlight G1.5	021 - 022
MINI EYES	Mini recessed spotlight	023 - 026
Gu10 SPOT	GU10 spotlight	027 - 028

LED Downlight

PIZZA	Multi-fit downlight	033 - 036
CAKE	Metal slim downlight	037 - 038
EIFFEL	Module downlight	039 - 044
DE GAULLIST	Deep recessed downlight UGR19	045 - 045
MAGIC HAT	Deep recessed downlight UGR22	046 - 048
CLOVER	Fire-rated downlight	049 - 054

■ RESIDENTIAL

LED Spotlight

AMBER	DIY slim recessed spot light	060 - 060
ROSEY	Metal slim recessed spot light	061 - 062
SOFIA	DIY G3 recessed spot light	063 - 063
AVALOR	DIY G4 recessed spot light	064 - 065
CLIO	DIY high power recessed spot light	066 - 066
PEGGY/EMILY/BOX	Surface mounted spot light	067 - 072
MODULE	Module & fixture	073 - 074
GECO	GU10	075 - 076

LED Downlight

FLYING	Backlit downlight	081 - 081
CREPE	Sidelit downlight	082 - 082
BAGEL	Cabinet light	083 - 084

■ LED CEILLING AND WALL LIGHT

CD MIRROR/ MUFFIN/ADELINE	LED Ceilling light	087 - 092

■ LED SMART LIGHT

Smart Light Source	097 - 102
Smart Down Light	103 - 106
Smart Ceiling Light	107 - 110
Smart Fire Rated Down Light	111 - 112

Commercial Spotlight

ROLAND - 360° Rotatable


SL360-A01
012


SL360-B01
012


SL360-A02
013


SL360-B02
013

JAMES - 360° Eco rotatable New


SL361D
015


SL361-C1
016

COREIN - Module New


SL005-ML
019


SL005-MR
019


SL005-FT
019


SL005-AT
019


SL005-FDT
019


SL005-ADT
019


SL005-SFT
019


SL005-SAT
019

MIRANDA - Deep recessed G1.5


SL015-W044
021


SL015-W044
021


SL015-N044
021


SL015-N044
021

MINI EYES


SL004-A1
024


SL004-A3
025

GU10 New


SL003-GU10
027

Commercial Downlight

PIZZA - Multi-fit New


DL003-606D
034


DL003-606D
034


DL003-606D
034


DL003-M01
035


PDL003-E01
036

CAKE - Metal slim


DL007-A01D
037


DL007-A02D
037


DL007-A03D
037


DL007-A04D
037

EIFFEL - Module New


DL004-A30
041


DL004-B30
042


DL004-C30
043


DL004-D60
044

DE GAULLIST - Deep Recessed Downlight



DL005-W4S
045



DL005-B6S
045



DL005-B8S
045

MAGIC HAT



DL060-8
046



DL060-8
046

BLACK SWAN


DL003-01B10D (Black)
047


DL003-01B10D (White)
047

CLOVER - Fire-rated


SL002-C01
050


SL002-B01
051


SL002-A03
052


SL360-A03
053


SL361-A03
054

Residential Spotlight

AMBER - DIY slim


SL001-C01
060


SL001-C02
060


SL001-C03
060

ROSEY - Metal slim


SL001-D01
061


SL001-D02
061

SOFIA - DIY G3


SL001-A01
063


SL001-A02
063


SL001-A03
063

CLIO - DIY high power New


SL001-B01
064


SL001-B02
066


SL001-B03S
066

AVALOR - DIY G4 New


SL001-E01
064


SL001-E02
064


SL001-E02
064


SL001-F01
065


SL001-F02
065

PEGGY / EMILY / BOX - Surface mounted


SP001-A01B
068


SP001-A02B
068


SP001-A03B
068


SP001-A04B
068


SP001-D01B
069


SP001-D03B
069


SP001-E01W
072


SP001-E02W
072


SP001-E04W
072

Module & Fixture New


SL003-A01
074


SL003-B01
074


SL003-C01
074

GECO - GU10 New


SL003-GU10B01
075


SL003-GU10B02
075


SL003-GU10B03
075

Residential Downlight

FLYING - Backlit


DL002-A25
081


DL002-A30
081


DL002-A35
081


DL002-A40
081


DL002-A50
081


DL002-A60
081


DL002-A80
081

CREPE - Sidelit


DL001-075R
082


DL001-100R
082


DL001-125R
082


DL001-150R
082


DL001-220R
082


DL001-075S
082


DL001-110S
082


DL001-125S
082


DL001-150S
082


DL001-220S
082

BAGEL - Cabinet light


DL008-A
083


DL008-B
083

LED Ceiling and wall light

CD Mirror New


CL002-A11
087


CL002-B15
087


CL002-C24
087

Muffin New


CL005-D12
088

Adeline New


CL003-A01
089


CL001-300
092


CL001-300
092

ADAYO



▲ Foryou Industrial Park

PROFILE

Foryou Corporation


Established in **1993**, listed in **2017**
Leading in auto electronics of China
2,000+ R&D engineers
Auto Industry Quality Control System
560,000 square meters industrial park

Top 100 Electronic Information Enterprises Of China
Top 100 Enterprises In Guangdong
Top 500 Manufacturers of China
500 Most Influential Brands of Asian

About us



Huizhou Foryou Optoelectronic Technology Co., Ltd (ADAYO lighting) is a wholly-owned subsidiary of Foryou corporation, which entered the LED packaging industry in 2006, and established in 2012 with registered capital of 32 million US dollar. There are three business lines: LED package, LED high power driver and LED lighting.

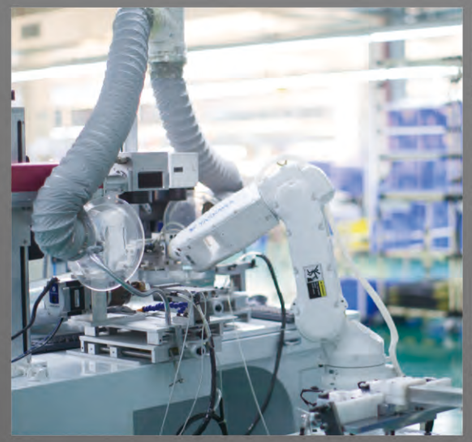







Our lab covers an area of 1200m^2 which complies international standard and has more than 100 test equipments. Thus, we can do safety test, reliability test, photoelectric parameter test, dropping and shaking test, EMI and EMC test. Our factory is qualified with ISO9001, ISO14001 and the products can pass CE/CB/FCC/UL/SAA/BS476-20/BS476-21 and other international certifications.






Our professional sales team can provide consulting sales services for different markets; Our R&D team with more than 60 people, one third of them with more than 20 years of experience in the lighting industry. A new range of product will be launched every one month in average.

The rigorous quality team, controls quality with industry standard from the incoming materials, production, and finished products providing strong quality support for your sales.



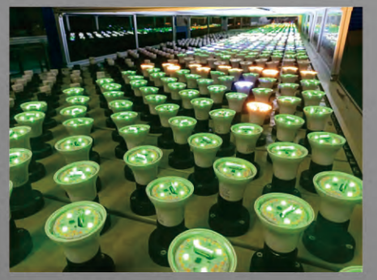





There are more than 300 workers and 50 production lines of LED package, LED high power driver and LED lighting, including 30 automatic and semi-automatic lines, with a monthly capacity of 2 million pcs LED down light, LED ceiling light, LED spot light, LED smart light.

ADAYO lighting adheres to the spirit of hard work in the manufacturing industry, persists in reform and innovation, and joins hands with customers and peers from all walks of life to seek common development and win-win cooperation.

Certification




DNV·GL

MANAGEMENT SYSTEM CERTIFICATE

Certificate No: 168403-2014-AQ-RGC-RvA | Initial certification date: 03 September, 2014 | Valid: 03 September, 2020 - 03 September, 2023

This is to certify that the management system of

Huizhou Foryou Optoelectronics Technology Co., Ltd.

District B, Foryou Industry Park, No.1, North Shangxia Road, Dongjiang Hi-tech Industry Park, Huizhou, Guangdong, P.R. China

has been found to conform to the Quality Management System standard:
GB/T 19001-2016/ISO 9001:2015

This certificate is valid for the following scope:

Design and Manufacture of LED Package, LED Driver and LED Lighting

Place and date: Shanghai, 02 September, 2020

For the issuing office: DNV GL – Business Assurance Suite A, Building F, No.1305 Hongjiao Road, Changning District, Shanghai 200336, P.R. China TEL: +86 21 32739000

Zhu Hai Ning, Management Representative


DNV·GL

MANAGEMENT SYSTEM CERTIFICATE

Certificate No: 168403-2014-AE-RGC-RvA | Initial certification date: 03 September, 2014 | Valid: 03 September, 2020 - 03 September, 2023

This is to certify that the management system of

Huizhou Foryou Optoelectronics Technology Co., Ltd.

District B, Foryou Industry Park, No.1, North Shangxia Road, Dongjiang Hi-tech Industry Park, Huizhou, Guangdong, P.R. China

has been found to conform to the Environmental Management System standard:
ISO 14001:2015

This certificate is valid for the following scope:

Design and Manufacture of LED Package, LED Driver and LED Lighting

Place and date: Shanghai, 02 September, 2020

For the issuing office: DNV GL – Business Assurance Suite A, Building F, No.1305 Hongjiao Road, Changning District, Shanghai 200336, P.R. China TEL: +86 21 32739000

Zhu Hai Ning, Management Representative



Technical Report No. 68.402.19.1291.01
Rev. 00
Dated 2019-12-06

Client:	Huizhou Foryou Optoelectronics Technology Co., Ltd.
Address:	Building 6, B Area, No.1 North Shangxia Road, Dongjiang High-Tech Industry Park Huizhou.
Attn.:	Li Yi
Sample Description:	Ceiling light, Downlight
Tested Model No.:	CYE25A-0050B6C3, CYF25A-0060B6C1-9, DL25U-W009A0-340
Reference Model No.:	Please refer to APPENDIX II
Exported to:	Europe
Sample Received Date:	2019-11-25
Test Period:	From 2019-11-25 to 2019-12-04
Location of Testing:	TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Purpose of examination:	Verification of RoHS (Restriction of Hazardous Substances) directive 2011/65/EU and its amendment (EU) 2015/863 on submitted samples
Test Result:	Refer to following page(s)
Remark:	-The result relates only to the items tested. -The reference model(s) was declared by client.

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
TÜV SÜD Group

Prepared by: Elsa Deng, Project Handler

Reviewed by: Scarlett Liang, Designated Reviewer

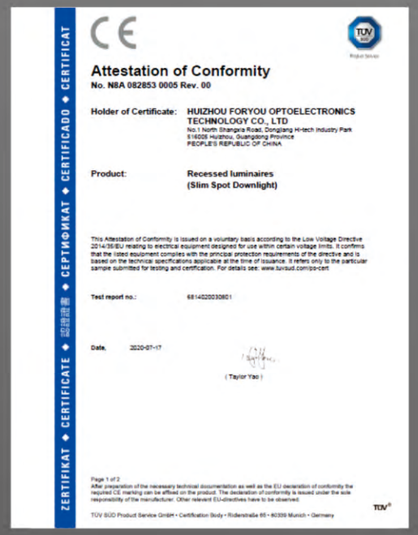
CE

TÜV SÜD Product Service

Attestation of Conformity
No. NBA 082853 0005 Rev. 00

Holder of Certificate: HUIZHOU FORYOU OPTOELECTRONICS TECHNOLOGY CO., LTD
No.1 North Shangxia Road, Dongjiang Hi-tech Industry Park
516028 Huizhou, Guangdong Province
PEOPLE'S REPUBLIC OF CHINA

Product: Recessed luminaires (Slim Spot Downlight)

This Attestation of Conformity is issued on a voluntary basis according to the Low Voltage Directive 2014/35/EU relating to electrical equipment designed for use within certain voltage limits. It confirms that the listed equipment complies with the principal protection requirements of the directive and is based on the technical specifications applicable at the time of issuance. It refers only to the particular sample submitted for testing and certification. For details see: www.tuvsud.com/ps-cert

Test report no.: 68140220308G1

Date, 2020-07-17

(Taylor Yao)


Page 1 of 2
After preparation of the necessary technical documentation as well as the EU declaration of conformity the required CE marking can be affixed on the product. The declaration of conformity is issued under the sole responsibility of the manufacturer. Other relevant EU-directives have to be observed.

TÜV SÜD Product Service GmbH • Certification Body • Ridlerstraße 65 • 80339 Munich • Germany

ZERTIFIKAT ◆ CERTIFICATE ◆ СЕРТИФИКАТ ◆ CERTIFICADO ◆ CERTIFICAT

ADAYO

Three Main Business

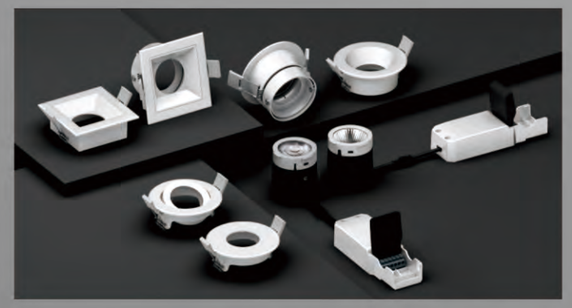

LED Lighting



LED High Power Driver




LED Package

COMMERCIAL

LED Spotlight

ROLAND	360° Rotatable recessed spotlight	011 - 014
JAMES	360° ECO Rotatable recessed spotlight	015 - 016
COREIN	Module recessed spotlight	017 - 020
MIRANDA	Deep recessed spotlight G1.5	021 - 022
MINI EYES	Mini recessed spotlight	023 - 026
GU10 SPOT	GU10 spotlight	027 - 028

ADAYO

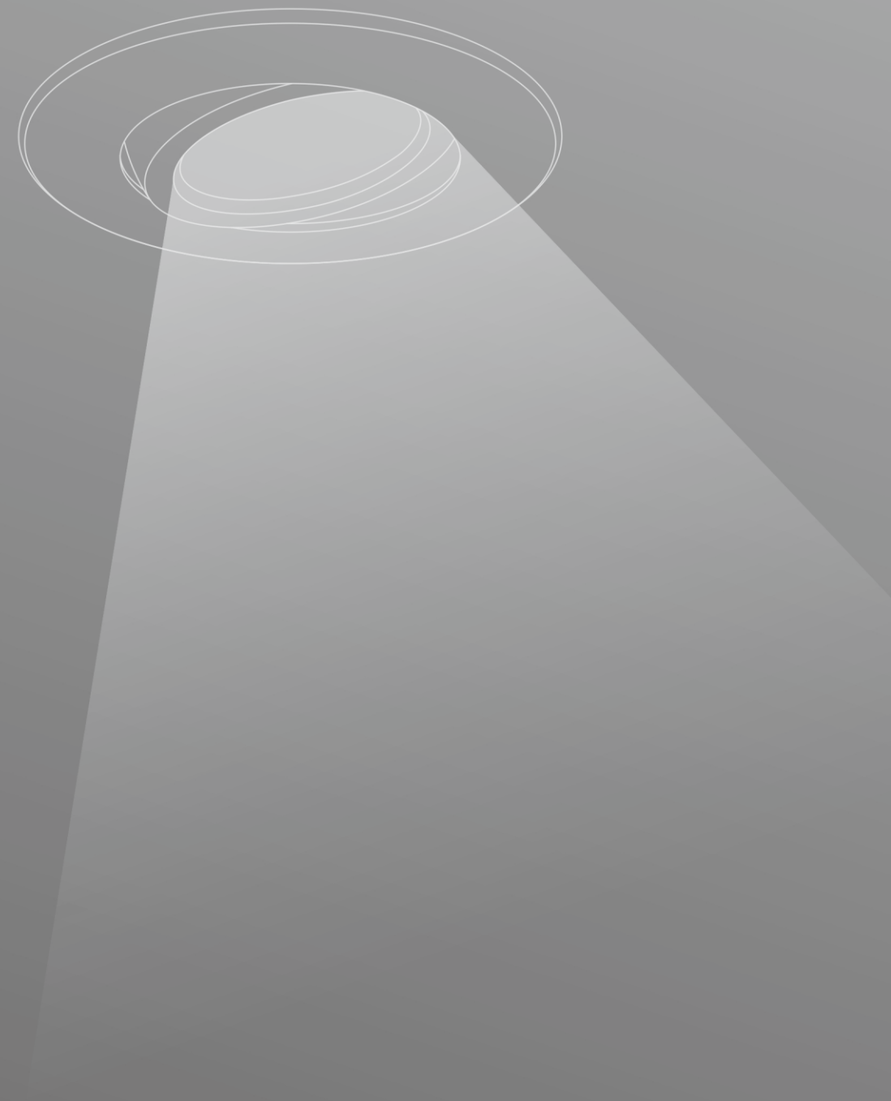

Commercial Spotlight

ROLAND - 360° Rotatable



SL360-A01
012



SL360-B01
012



SL360-A02
013



SL360-B02
013

JAMES - 360° Eco rotatable New



SL361D
015



SL361-C1
016

COREIN - Module New



SL005-ML
019




SL005-MR
019



SL005-FT
019



SL005-AT
019



SL005-FDT
019



SL005-ADT
019



SL005-SFT
019



SL005-SAT
019

MIRANDA - Deep recessed G1.5



SL015-W044
021



SL015-W044
021



SL015-N044
021



SL015-N044
021

MINI EYES



SL004-A1
024



SL004-A3
025

GU10 New



SL003-GU10
027

ADAYO

360°
ROTATABLE SPOT LIGHT

Screw free design
Loop in and loop out

CCT selectable
Select CCT by button before installation

Male and female plug
Quick installation and can easily change to other drivers

Insulation coverable



Lens and reflector optional

SMD (Lens)

COB (Reflector)

360° Rotatable
360° stepless tiltable

ROLAND I





Features

- Separated isolated driver with built in terminal
- Male & female plug between driver and lamp
- Die-cast aluminum heat sink, surface coating treatment

Water-proof
Front waterproof IP65



CCT Selectable
CCT3 switch changeable on driver



Dim to Warm
Dimmable by dimmer



360° Rotation
360° angle adjusted from all directions




Application

Home, Shop, Specialty Stores, Showroom etc.


Finish optional







220-240V ~50/60Hz | 80 Ra CRI | 90 Ra CRI | L70B50 50,000H | IP20 IP65 | Triac Dim | RoHS | CE



Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
SL360-A01DS	8.5W	720lm	3000K/4000K/6500K	38°	Black/White/Silver/Brushed Nickel	ϕ78mm	ϕ96x43mm
SL360-A01DC	8.5W	720lm	CCT3				
SL360-A01DW	8.5W	720lm	2200-2700				
SL360-B01DS	6W	500lm	3000K/4000K/6500K	38°	Black/White/Silver/Brushed Nickel	ϕ65mm	ϕ81x41mm
SL360-B01DC	6W	500lm	CCT3				

ROLAND II







Application

Home, Shop, Specialty Stores, Showroom etc.

Features:

- Irradiation angle 360° horizontal adjustment, 30° tilt adjustment
- CCT3 and dimming
- IP65 water-proof
- Separate isolated power supply connect lamp with connect terminal
- Tooling free installation
- Can be used as fire rated down light with a iron can cover

Finish optional



Water-proof

IP65 can be used into wet applications




360° Rotation

Can be adjusted angle from all directions







Beam Angle: 38°






Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
SL360-A02	8.5W	720lm	3000K/4000K/6500K	38°	Black/White/Silver/Brushed Nickel	ϕ78mm	ϕ96x43mm
SL360-B02	6W	500lm	3000K/4000K/6500K	38°	Black/White/Silver/Brushed Nickel	ϕ65mm	ϕ81x41mm

JAMES





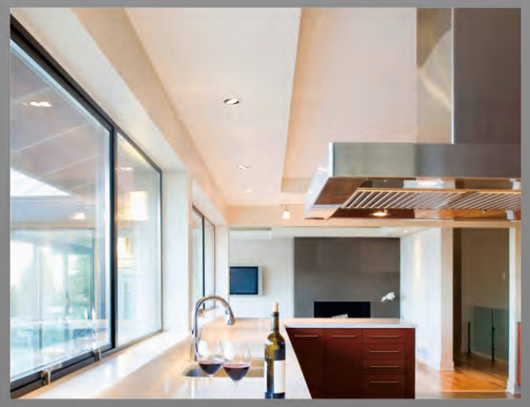

Application


Home, Office, Shop, Hotel etc.

Features:

- Separated isolated driver with built in terminal
- Male & female plug between driver and lamp

Finish optional


Black


White

Water-proof

Front waterproof IP54



360° Rotation

360° angle adjusted from all directions




CCT3


CCT3 switch changeable on driver







Beam Angle: 38°




220-240V ~50/60Hz | 80 Ra CRI | 90 Ra CRI | L70B50 50,000H | IP20 IP54 | Triac Dim | RoHS | CE

Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
SL361-C01A	6W	500lm	3000K/4000K/6500K	38°	Black/White	ϕ68mm	ϕ81x32mm
SL361-C02B	6W	500lm	CCT3	38°	Black/White	ϕ68mm	ϕ81x32mm

JAMES







Application

Home, Office, Shop, Hotel etc.

Features:

- Irradiation angle 360° horizontal adjustment, 30° tilt adjustment
- Separate isolated power supply connect lamp with connect terminal
- Tooling free installation
- Can be used as fire rated down light with a iron can cover

Finish optional


Black


White

Water-proof

Front waterproof IP54




360° Rotation


360° angle adjusted from all directions







Beam Angle: 38°




220-240V ~50/60Hz | 80 Ra CRI | 90 Ra CRI | L70B50 50,000H | IP20 IP54 | Triac Dim | RoHS | CE

Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
SL361-C02	6W	500lm	3000K/4000K/6500K	38°	Black/White	ϕ68mm	ϕ81x32mm

COREIN

MODULE RECESSED SPOTLIGHT

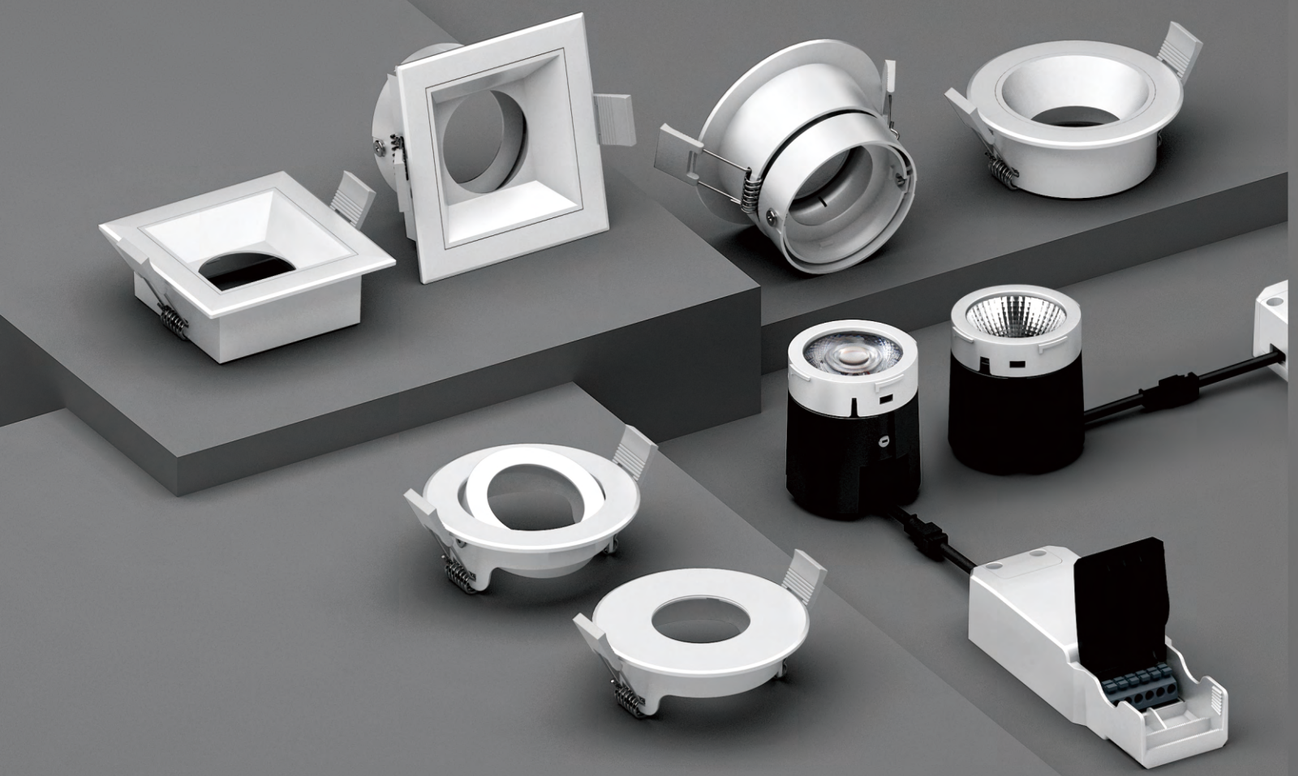


ADAYO



COREIN



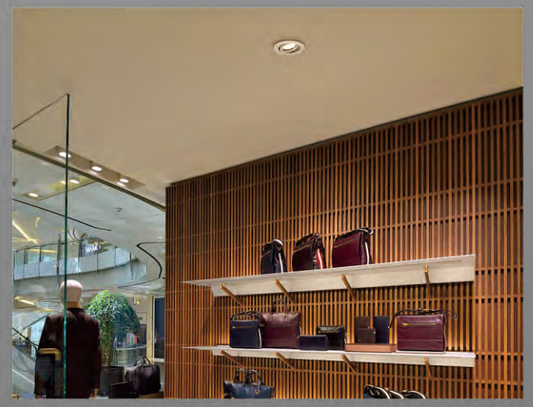

Application

Home, Office, Shop, Hotel etc.

Features:

- Module design, die-casting housing
- Isolated driver
- Beam angle 24°, 36° for choosing
- Fixed and adjustable avaliable
- 90-100lm/w, 5 years warranty



Frame optional



IP Class

IP44 of adjustable and IP65 of fixed from front.




Die-casting


Die-casting heat sink, heat fast












220-240V ~50/60Hz | 80Ra CRI | L70B50 50,000H | IP20 IP44 | IP20 IP65 | Triac Dim | Non Dim | RoHS | CE

Model	Wattage	Lumen	CCT	Beam	Type	Cut hole	Dimensions
SL005-A	7W	700lm	3000K/4000K/6500K	24°/36°	Fixed/Adjustable	ϕ68mm	ϕ85x62mm
SL005-B	10.5W	1000lm					
SL005-C	12.5W	1300lm		36°			


EXTENTION TRIM

Round Flat Fixed Trim




ϕ68mm

Finish: White
Material: Aluminum body
IP Rate: IP20
Size: ϕ85x20mm




Round Flat Adjustable Trim




ϕ68mm

Finish: White
Material: Aluminum body
IP Rate: IP20
Size: ϕ85x20mm




Round Deep Fixed Trim



ϕ68mm

Finish: White
Material: Aluminum body
IP Rate: IP20
Size: ϕ85x20mm

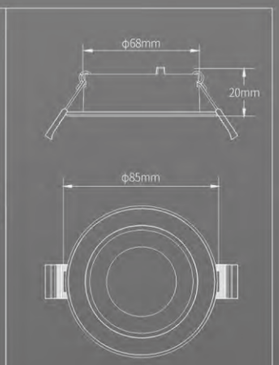


Round Deep Adjustable Trim



ϕ68mm

Finish: White
Material: Aluminum body
IP Rate: IP20
Size: ϕ85x44mm

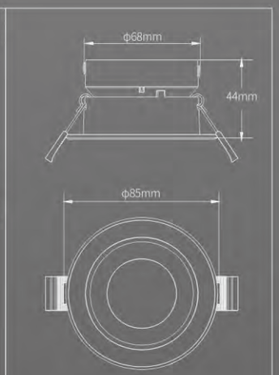


Square Deep Fixed Trim



68x68mm

Finish: White
Material: Aluminum body
IP Rate: IP20
Size: 85x85x24mm




Square Deep Adjustable Trim



68x68mm

Finish: White
Material: Aluminum body
IP Rate: IP20
Size: 85x85x44mm

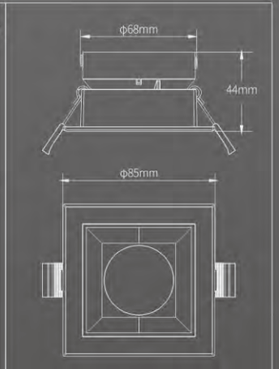

MIRANDA



SL015-W044
(Adjustable)



SL015-W065
(Fixed)

SL015-N065
(Fixed)

SL015-N044
(Adjustable)

Features:

- Deep recessed and anti-glare
- Die-casting housing, good heat dissipation
- Dimming and IP65 / IP44 optional

Water-proof

Front waterproof IP44/IP65 available



Fast connecting terminal

2pin loop in and loop out



Extra Frame

Can be covered directly by the insulation





Application


Home, Office, Shop, Hotel etc.

Color of Reflector optional:




Black White





Beam Angle: 38°

220-240V ~50/60Hz | 80 Ra CRI | L70B50 25,000H | IP20 IP44 | IP20 IP65 | Triac Dim | RoHS | CE



Model	Wattage	Lumen	CCT	Beam	Type	IP Rate	Cut hole	Dimensions
SL015-W044	9W	700lm	3000K/4000K/6500K	38°	Adjustable	IP44	ϕ68mm	ϕ86x62mm
SL015-N044	9W	650lm						
SL015-W065	9W	700lm	3000K/4000K/6500K	38°	Fixed	IP65	ϕ68mm	ϕ86x62mm
SL015-N065	9W	650lm						

ADAYO

MINI EYES





ADAYO

MINI EYES







Application

Wardrobe, Cupboard, Bookcase, Cabinet , Indoor space.

Features:

- Die-casting aluminum body, good heat dissipation
- Small size for narrow space

Small Size

The 25mm mini size is suitable for a more narrow space



Aluminum Body

Die-casting aluminum body, good heat dissipation



220-240V ~50/60Hz | 80Ra CRI | L70B50 30,000H | IP20 IP20 | Triac Dim | Non Dim | RoHS | CE

Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
SL004-A1	1W	70lm	3000K/6500K	38°	ϕ28mm	ϕ38x25mm

MINI EYES





Features:

- Die-casting aluminum body, good heat dissipation
- Small size for narrow space
- 12pcs with a junction box and one driver
- RF remote control dimming and group setting

Application

Bathroom Cabinet, Kitchen, Balcony, Canopy etc.

Water-proof

Front waterproof IP65 availiable



Aluminum Body

Die-casting aluminum body, good heat dissipation



Remote Control

Dimming and group setting



Accessories




Driver & Junction box



RF remote control dimming

Line Art

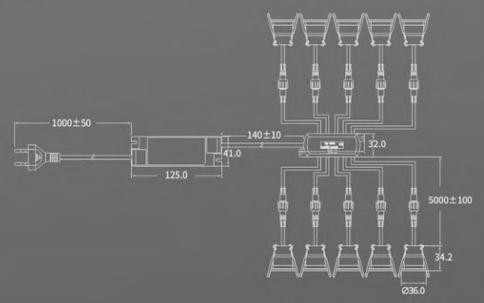

220-240V ~50/60Hz | 80 Ra CRI | L70B50 30,000H | IP20 IP20 | IP20 IP65 | RF | Non Dim | RoHS | CE

Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
SL004-A3	3W	210lm	3000K/6500K	38°	ϕ28mm	ϕ36x34mm

GU10 SPOT





Application

Hotel, shops, showroom etc.

Features:


- Suitable to be used in fire-rated downlight or GU10 downlight covered by insulation material
- COB-likelens, providinguniformlight
- One-piece heatsink, better heat dissipation capability
- Compatible with leading edge and trailling edge dimmers
- CCT selectable
- White, grey color optional
- Ra90, up to 100lm/W
- 50000hrs lifespan, 5years' warranty

Finished optional:



White Grey

Full insulation coverable

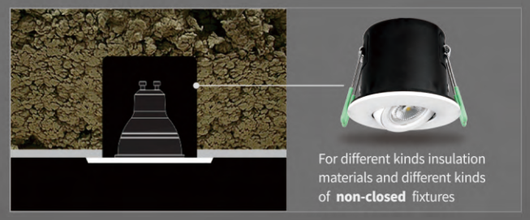

For different kinds insulation materials and different kinds of **non-closed** fixtures



220-240V ~50/60Hz | 90 Ra CRI | L70B50 50,000H | IP20 IP20 | Triac Dim | RoHS | CE

Model	Wattage	Lumen	CCT	Beam	IP Rate	Dimensions
SL003-GU10B01	6W	570lm/600lm	3000K/4000K	38°	IP20	ϕ50x54mm

ADAYO

COMMERCIAL

LED Downlight

PIZZA	Multi-fit downlight	051 - 054
CAKE	Metal slim downlight	055 - 056
EIFFEL	Module downlight	057 - 062
DE GAULLIST	Deep recessed downlight UGR19	063 - 063
MAGIC HAT	Deep recessed downlight UGR22	064 - 066
CLOVER	Fire-rated downlight	067 - 072

ADAYO



Commercial Downlight

■ PIZZA - Multi-fit


DL003-606D
034


DL003-606D
034


DL003-606D
034


DL003-M01
035


PDL003-E01
036

■ CAKE - Metal slim


DL007-A01D
037


DL007-A02D
037


DL007-A03D
037


DL007-A04D
037

■ EIFFEL - Module


DL004-A30
041


DL004-B30
042


DL004-C30
043


DL004-D60
044

■ DE GAULLIST - Deep Recessed Downlight



DL005-W4S
045



DL005-B6S
045



DL005-B8S
045

■ MAGIC HAT



DL060-8
046



DL060-8
046

■ BLACK SWAN


DL003-01B10D (Black)
047


DL003-01B10D (White)
047

■ CLOVER - Fire-rated


SL002-C01
050


SL002-B01
051


SL002-A03
052


SL360-A03
053


SL361-A03
054


ADAYO

MULTI-FIT
FLAT DOWNLIGHT



Screw Free
3pin loop in and loop out


Adjust lever
Adjustable buckle cut size
Φ 50-260mm

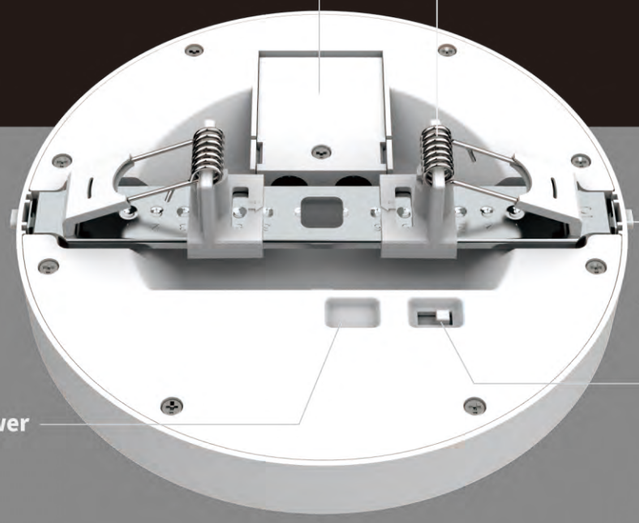

22mm

CCT3
CCT3 changeable optional

Multi-power

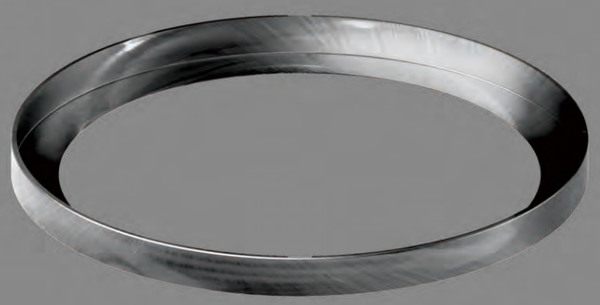

Bezels optional:
Detachable trim bezels of 4 colors.



Black Brushed Nickel Silver Chrome

PIZZA







Application
Corridor, Aisle, Circulation area

Features

- Adjustable buckle cut size Φ 50-260mm
- CCT3 switch on the back
- Dimming , non-dimming, multi-power optional
- Black, silver, chrome and brushed nickel bezel optional
- Slim body height 22mm

Color of Bezels optional



Black Brushed Nickel Silver Chrome

Cut Out
For ϕ50mm-ϕ260mm cut hole




Ultra-slim
The ultra-slim design satisfies a narrow space with more elegance



CCT3 & Multi-power
CCT3 & Multi-power changeable switch on back



220-240V ~50/60Hz | 80Ra CRI | L70B50 30,000H | IP20 IP20 | Triac Dim | Non Dim | RoHS | CE



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL003-606D	6W	600lm	3000K-4000K-6500K	110°	ϕ50-125mm	ϕ165x22mm
DL003-612D	12W	1100lm			ϕ50-125mm	ϕ165x22mm
DL003-818D	18W	1700lm			ϕ65-185mm	ϕ217x22mm
DL003-1121D	18W	1800lm			ϕ65-260mm	ϕ290x22mm
DL003-1123D	23W	2300lm			ϕ65-260mm	ϕ290x22mm

PIZZA SENSOR






Application

Corridor, Aisle, Circulation area

Features

- Adjustable buckle cut size Φ 65-185mm
- PIR infrared sensor, you can set the off time 5s/30s/60s/180s after leaving





Beam Angle: 110°

Cut Out

For ϕ60mm-ϕ185mm cut hole



Ultra-slim


The ultra-slim design satisfies a narrow space with more elegance



PIR infrared Sensor

Can set light off time 5s/30s/60s/180s after leaving



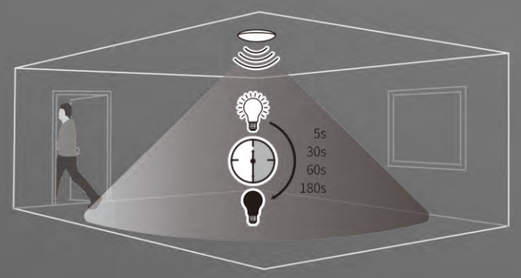

220-240V ~50/60Hz | 80 Ra CRI | L70B50 25,000H | IP20 IP20 | PIR | RoHS | CE



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL003-M01	9W-18W	900lm-1800lm	CCT3	110°	ϕ65-185mm	ϕ227x22mm

PIZZA EMERGENCY






Application

Corridor, Aisle, Circulation area

Features

- Adjustable buckle cut size Φ 65-185mm
- Emergency response time: 3 hours
- Power failure can be automatically lit up
- Multi-fit power changeable switch on driver





Beam Angle: 110°

Cut Out

For ϕ65mm-ϕ185mm cut hole



Ultra-slim

The ultra-slim design satisfies a narrow space with more elegance



220-240V ~50/60Hz | 80 Ra CRI | L70B50 25,000H | IP20 IP20 | RoHS | CE



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL003-E01	18W	1800lm	4000K	110°	ϕ65-185mm	ϕ227x22mm

CAKE







Application

Home, Office, Shop, Hotel etc.

Features

- Metal slim body height 38mm
- External isolated driver
- Excellent dimming performance

IP44 Design

IP44 from front




Metal Housing

One piece stamped metal housing



220-240V ~50/60Hz | 80 Ra CRI | L70B50 50,000H | IP20 IP44 | Triac Dim | Non Dim | RoHS | CE



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL007-A01D	7W	570lm	2700K/3000K/4000K	100°	ϕ90mm	ϕ112x37mm
DL007-A02D	12W	920lm			ϕ120mm	ϕ146x38mm
DL007-A03D	15W	1200lm			ϕ150mm	ϕ180x38mm
DL007-A04D	25W	2100lm			ϕ200mm	ϕ235x38mm

ADAYO

EIFFEL

MODULE DOWNLIGHT



Deep recessed downlight



Slight recessed downlight



Flat recessed downlight



Surface-mounted downlight

Combination of accessories

Module



Extention Recessed Trim



Flat recessed trim




Slight recessed trim



Deep recessed trim

Surface-mounted Trim



Surface-mounted Frame

EIFFEL





Application

Mall, Hall, Meeting Room, Hotel etc.

Features

- Moudle deisgn
- CCT selectable
- High lighting efficiency 100lm/W
- IP44 for room side
- Tool free installation
- PC housing and PC reflector
- 50000hrs lifespan, 5 years warranty



Module design

Multiple sizes to meet different needs



CCT3

CCT3 changeable switch on back




Screw free

Loop in and loop out



220-240V ~50/60Hz | 80Ra CRI | L70B50 50,000H | IP20 IP44 | Triac Dim | RoHS | CE



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL004-A30	6W	600lm	CCT3	100°	ϕ90mm	ϕ110x37mm
DL004-A40	9W	900lm			ϕ120mm	ϕ140x37mm
DL004-A60	15W	1600lm			ϕ150mm	ϕ160x37mm
DL004-A80	23W	2500lm			ϕ200mm	ϕ210x37mm

ADAYO

EIFFEL





Application

Mall, Hall, Meeting Room, Hotel etc.

Features

- Moudle deisgn
- CCT selectable
- High lighting efficiency 100lm/W
- IP44 for room side
- Tool free installation
- PC housing and PC reflector
- 50000hrs lifespan, 5 years warranty



Module design

Multiple sizes to meet different needs



CCT3

CCT3 changeable switch on back




Screw free

Loop in and loop out



220-240V ~50/60Hz | 80Ra CRI | L70B50 50,000H | IP20 IP44 | Triac Dim | RoHS | CE



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL004-B30	6W	600lm	CCT3	100°	ϕ90mm	ϕ120x52mm
DL004-B40	9W	900lm			ϕ120mm	ϕ150x52mm
DL004-B60	15W	1600lm			ϕ150mm	ϕ175x52mm
DL004-B80	23W	2500lm			ϕ200mm	ϕ230x52mm

EIFFEL





Features

- Moudle deisgn
- CCT selectable
- High lighting efficiency 100lm/W
- IP44 for room side
- Tool free installation
- PC housing , PC and Alu reflector
- 50000hrs lifespan, 5 years warranty



Application

Mall, Hall, Meeting Room, Hotel etc.

Color of reflector optional



Black reflector | Silver reflector | Mirror reflector

Module design

Multiple sizes to meet different needs



CCT3

CCT3 changeable switch on back




Screw free

Loop in and loop out



220-240V ~50/60Hz | 80Ra CRI | L70B50 50,000H | IP20 IP44 | Triac Dim | RoHS | CE



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL004-C30	6W	540lm	CCT3	100°	ϕ90mm	ϕ120x70mm
DL004-C40	9W	800lm			ϕ120mm	ϕ150x70mm
DL004-C60	15W	1500lm			ϕ150mm	ϕ175x80mm
DL004-C80	23W	2300lm			ϕ200mm	ϕ230x80mm

EIFFEL





Features

- Moudle deisgn
- CCT selectable
- High lighting efficiency 100lm/W
- Tool free installation
- PC housing and PC reflector
- 50000hrs lifespan, 5 years warranty



Application

Mall, Hall, Meeting Room, Hotel etc.

Module design

Multiple sizes to meet different needs



CCT3

CCT3 changeable switch on back




Screw free

Loop in and loop out



220-240V ~50/60Hz | 80Ra CRI | L70B50 50,000H | IP20 IP44 | Triac Dim | RoHS | CE



Model	Wattage	Lumen	CCT	Beam	Efficacy	Dimensions
DL004-D60	15W	1600lm	CCT3	100°	110lm/W	ϕ150x75mm
DL004-D80	23W	2500lm				ϕ200x75mm

DE GAULLIST






Application

Office, Shopping Mall, Hotel , Airport etc.

Features

- Anti-glare. UGR<14
- Integrated design, easy to install
- Multi-power and CCT3 optional
- 5 years warranty





Reflector Optional

Changeable reflector




CCT3

CCT3 changeable switch on back



220-240V ~50/60Hz | 80Ra CRI | UGR <19 | L70B50 50,000H | IP20 IP20 | Triac Dim | DALI Dim | Non Dim | RoHS | CE



Model	Wattage	Lumen	CCT	UGR	Beam	Cut hole	Dimensions
DL005-B4S	9W	1100lm	2700K/4000K/6500K	19	60°	ϕ125mm	ϕ145x92mm
DL005-B4C			CCT3	19	60°		
DL005-B4S-14			2700K/4000K/6500K	14	38°		
DL005-W6S	13W	1600lm	2700K/4000K/6500K	19	60°	ϕ150mm	ϕ175x110mm
DL005-W6C			CCT3	19	60°		
DL005-W6S-14			2700K/4000K/6500K	14	38°		
DL005-B8S	20W	2400lm	2700K/4000K/6500K	19	60°	ϕ200mm	ϕ220x140mm
DL005-B8C			CCT3	19	60°		
DL005-B8S-14			2700K/4000K/6500K	14	38°		

MAGIC HAT






Application

Mall, Hall, Meeting Room, Hotel etc.

Features

- Anti-glare. UGR<22
- Integrated design, easy to install
- Good heat dissipation performance





Heat Sink

Good heat dissipation performance




Fast connecting terminal

Loop in and loop out



220-240V ~50/60Hz | 80Ra CRI | UGR <22 | L70B50 50,000H | IP20 IP20 | Non Dim | RoHS | CE



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL060-6	12W	1000lm	2700K/4000K/6500K	100°	ϕ150mm	ϕ173x98mm
DL060-8	21W	2100lm			ϕ206mm	ϕ233x106mm

BLACK SWAN







Application

Home, Office, Shop, Hotel etc.

Color of Reflector optional



Black White Mirror Silver

Features

- Die-casting body, COB light
- Beam angle 15°, 24°, 38°, 55° optional
- White and black color body for choosing
- Black, white, mirror, silver color reflector optional

Die-casting

Die-casting body, good heat dissipation performance




Optical Accessories

2 optional accessories: Lens and reflector




Beam Angle

4 different angles for different scenes.



COB | 220-240V ~50/60Hz | 80 Ra CRI | UGR <22 | L70B50 50,000H | IP20 IP20 | Triac Dim | Non Dim | RoHS | CE



Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
DL003-01B10D	10W	900lm	3000K/4000K/5000K	38°	Black/White	ϕ70mm	ϕ86x55mm
DL003-01B18D	18W	1800lm				ϕ85mm	ϕ101x60mm
DL003-01B30D	30W	2800lm				ϕ120mm	ϕ140x73mm

ADAYO

ADAYO

FIRE RATED
DOWNLIGHT

Fire resistance test : BS476-20 / BS476-21



Tool-free
Tool-free design save the installation cost





Insulation Cover
Can be covered by insulation directly



Male and female plug
Quick installation and can easy change to other drivers





30/60/90 min anti-fire test



Front CCT3 Switch
2700K-6500K



Anti-glare design
Deep anti-glare

Accessories
Detachable trim bezels of 4 colors.



CLOVER V





Application
Home, Office, Shop, Hotel etc.

Features

- 30/60/90 min anti-fire test
- Up to 300mm height insulation coverable
- IP65 water-proof
- CCT3 changeable optional
- 3pin loop in and loop out
- Wifi function avaliable
- Low profile design, good for narrow space



Color of Bezels optional



Fire-rated
Adopt flame retardant material, safe and secure




CCT3
Front switch to change the CCT



Tool-free
Tool-free design save the installation cost








Beam Angle: 60°

220-240V ~50/60Hz | 80 Ra CRI | L70B50 25,000H | IP20 IP65 | Triac Dim | 90 | RoHS | CE



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
SL002-C01S	6W	500lm	3000K/4000K/6500K	60°	ϕ68mm	ϕ88x40mm
SL002-C01C	6W	500lm	CCT3			

CLOVER IV






Application

Home, Office, Shop, Hotel etc.

Color of Bezels optional

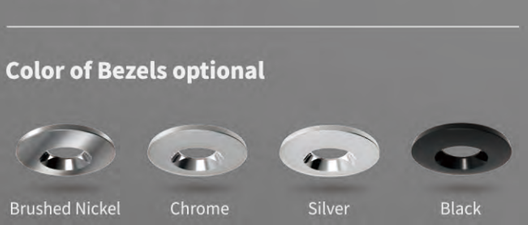

Features

- 30/60/90 min anti-fire test
- Up to 300mm height insulation coverable
- IP65 water-proof
- CCT3 changeable optional
- 3pin loop in and loop out

Fire-rated

Adopt flame retardant material, safe and secure



Tool-free

Tool-free design save the installation cost





CCT3

Front switch to change the CCT









220-240V ~50/60Hz | 80 Ra CRI | L70B50 25,000H | IP20 IP65 | Triac Dim | Non Dim | 90 | RoHS | CE

Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
SL002-B01S	6W	500lm	3000K/4000K/6500K	60°	ϕ68mm	ϕ88x64mm
SL002-B01C	6W	500lm	CCT3			

CLOVER III






Application

Home, Office, Shop, Hotel etc.

Color of Bezels optional

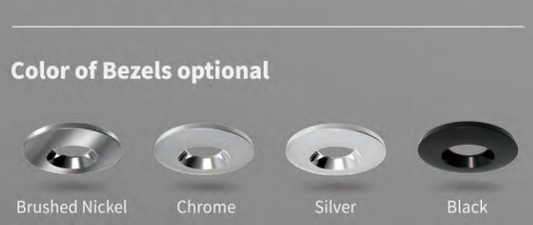

Features

- 30/60/90 min anti-fire test
- Up to 300mm height insulation coverable
- CCT3 changeable optional
- 3pin loop in and loop out
- Separated isolated driver with built in terminal
- Male & female plug between driver and lamp
- Wifi version optional

Fire-rated

Adopt flame retardant material, safe and secure



Tool-free

Tool-free design save the installation cost





CCT3

Front switch to change the CCT









220-240V ~50/60Hz | 80 Ra CRI | L70B50 50,000H | IP20 IP65 | Triac Dim | 30 60 90 | RoHS | CE

Model	Wattage	Lumen	CCT	LED Type	Beam	Cut hole	Dimensions
SL002-A03S	8.5W	600lm	3000K/4000K/6500K	COB	60°	ϕ70mm	ϕ88x65mm
SL002-A03C	8.5W	600lm	CCT3	SMD	60°	ϕ70mm	ϕ88x65mm

ROLAND III





Application

Home, Office, Shop, Hotel etc.

Features

- 30/60/90 min anti-fire test
- CCT3 and dimming
- Tooling free installation
- Irradiation angle 360° horizontal adjustment, 30° tilt adjustment
- Separate isolated power supply connect lamp with connect terminal
- Can be used as fire rated down light with a iron can cover

Finish optional



Fire-rated

Adopt flame retardant material, safe and secure



360° Rotation

Can be adjusted angle from all directions




CCT3


CCT3 switch changeable on driver












Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
SL360-A03FC	8.5W	720lm	CCT3 3000K/4000K/6500K	38°	Black/White/Silver	ϕ80mm	ϕ96x63mm
SL360-A03FS	8.5W	720lm					
SL360-B03FC	6W	500lm	CCT3 3000K/4000K/6500K	38°	Black/White/Silver	ϕ68mm	ϕ81x63mm
SL360-B03FS	6W	500lm					

ROLAND V



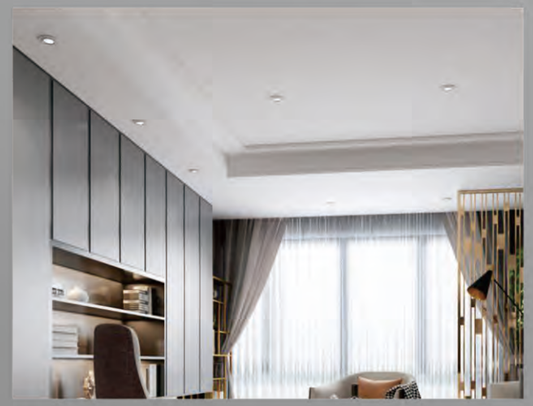


Application

Home, Office, Shop, Hotel etc.

Features

- 30/60/90 min anti-fire test
- CCT3 and dimming
- Tooling free installation
- Irradiation angle 360° horizontal adjustment, 30° tilt adjustment
- Separate isolated power supply connect lamp with connect terminal
- Can be used as fire rated down light with a iron can cover

Finish optional



Fire-rated

Adopt flame retardant material, safe and secure



360° Rotation

Can be adjusted angle from all directions




CCT3


CCT3 switch changeable on driver











Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
SL361-A03FC	6W	500lm	CCT3 3000K/4000K/6500K	38°	Black/White/Silver	ϕ68mm	ϕ81x63mm
SL361-A03FS	6W	500lm					


ADAYO

RESIDENTIAL

LED Spotlight

AMBER	DIY slim recessed spot light	060 - 060
ROSEY	Metal slim recessed spot light	061 - 062
SOFIA	DIY G3 recessed spot light	063 - 063
AVALOR	DIY G4 recessed spot light	064 - 065
CLIO	DIY high power recessed spot light	066 - 066
PEGGY / EMILY / BOX	Surface mounted spot light	067 - 072
MODULE	Module & fixture	073 - 074
GECO	GU10	075 - 076

ADAYO

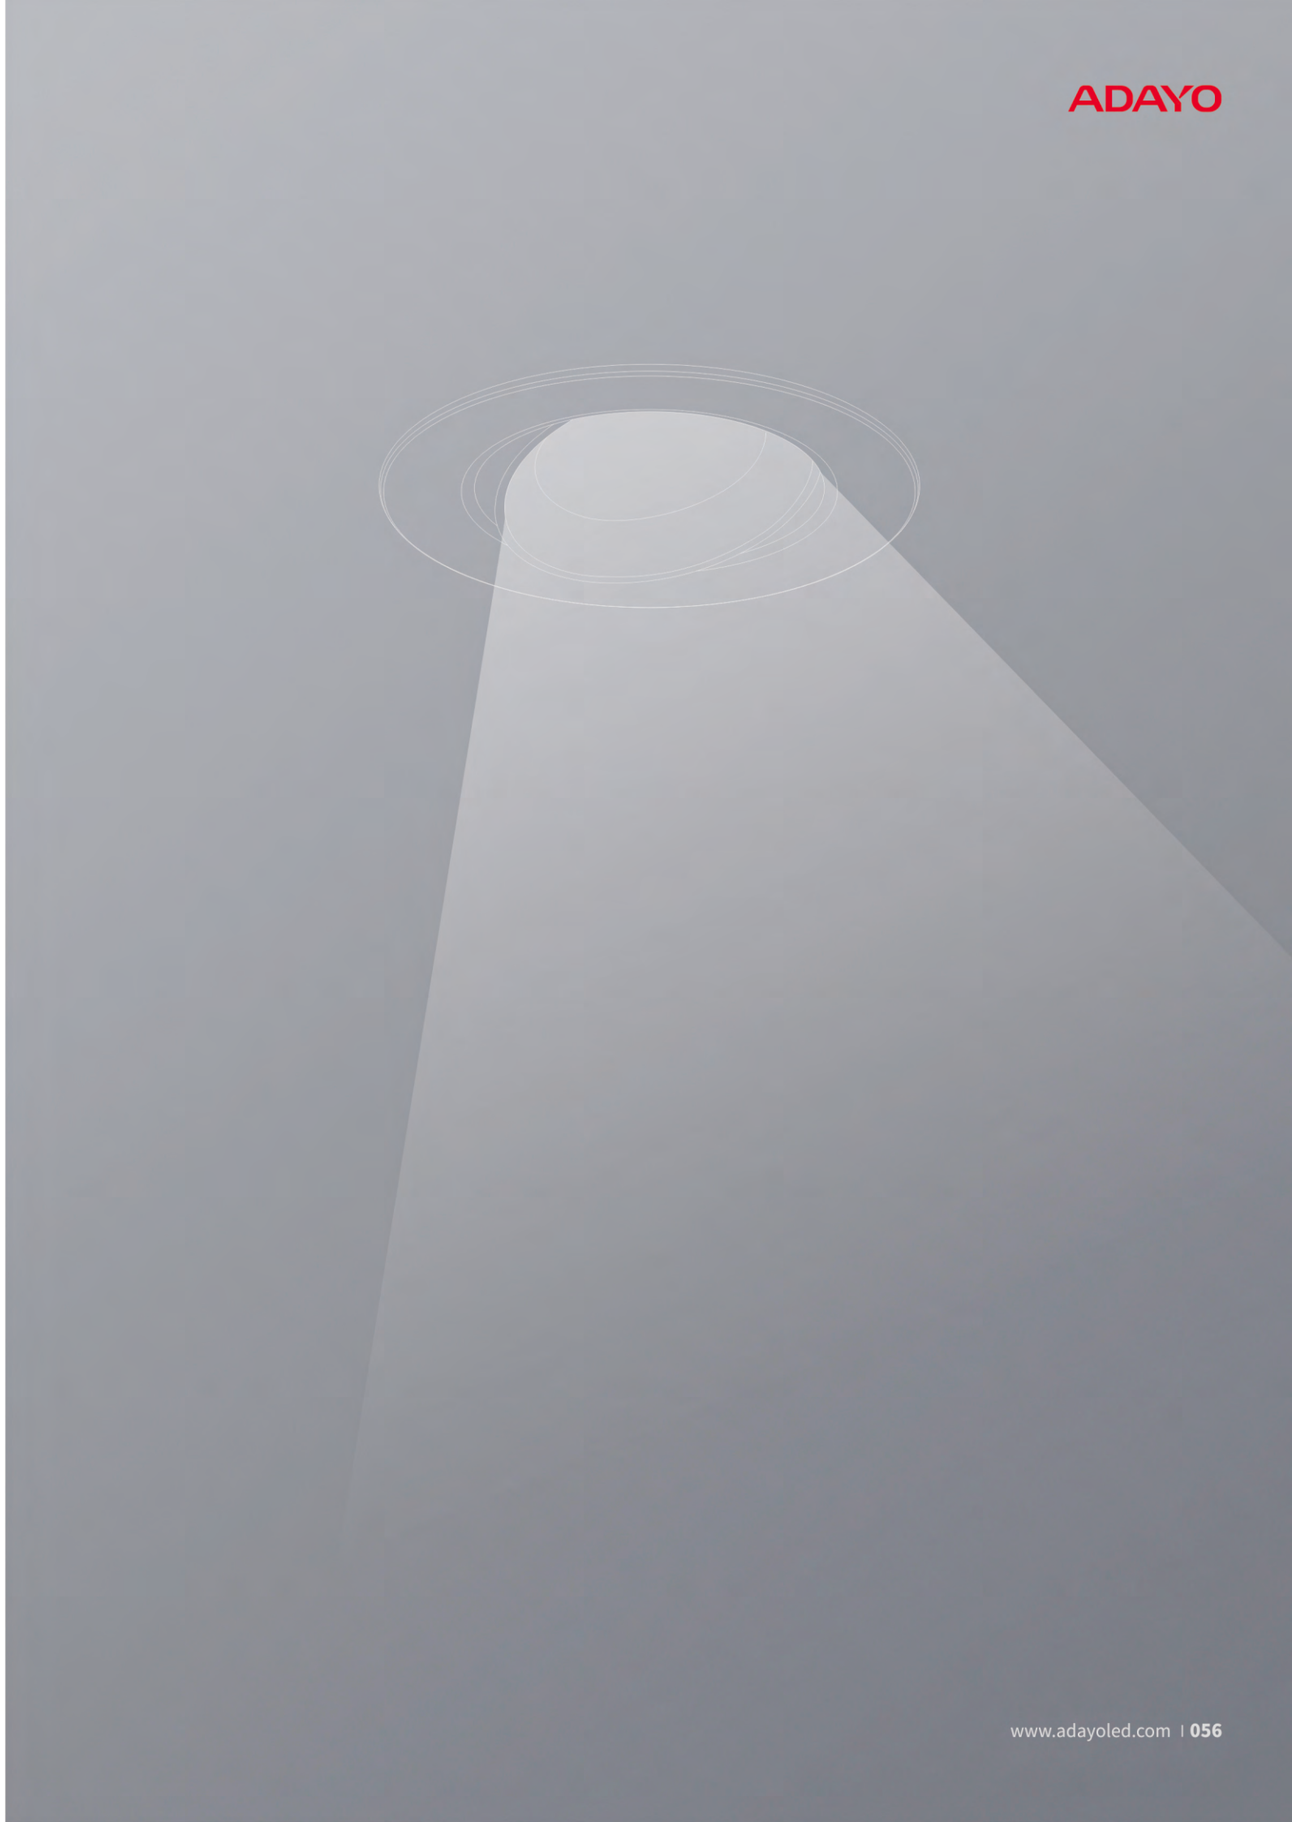

Residential Spotlight

■ AMBER - DIY slim



SL001-C01
060



SL001-C02
060



SL001-C03
060

■ ROSEY - Metal slim



SL001-D01
061



SL001-D02
061

■ SOFIA - DIY G3



SL001-A01
063



SL001-A02
063



SL001-A03
063

■ CLIO - DIY high power



SL001-B01
064



SL001-B02
066



SL001-B03S
066

■ AVALOR - DIY G4



SL001-E01
064



SL001-E02
064



SL001-E02
064



SL001-F01
065



SL001-F02
065

■ PEGGY / EMILY / BOX - Surface mounted



SP001-A01B
068



SP001-A02B
068



SP001-A03B
068



SP001-A04B
068



SP001-D01B
069



SP001-D03B
069



SP001-E01W
072



SP001-E02W
072



SP001-E04W
072

■ Module & Fixture



SL003-A01
074



SL003-B01
074



SL003-C01
074

■ GECO - GU10



SL003-GU10B01
075



SL003-GU10B02
075



SL003-GU10B03
075

ADAYO

ADAYO

DIY

RECESSED SPOT LIGHT



CCT selectable



Tool-free

Loop in and loop out

Bezels optional:

Different bezels changeable easily .




Brushed Nickel



Chrome



Silver



Black

AMBER



SL001-C02



SL001-C01



SL001-C03



Application

Home, Office, Shop, Hotel etc.

Features:

- different colors of bezels optional
- IP20/IP44/IP65 optional
- Tooling free design save the installation cost
- Ultra-thin design suitable for narrow space

Color of Bezels optional:

Round

Square



Brush Nickel | Chrome | Silver | Black

Water-proof

Front waterproof IP44/IP65



360° Rotation

Can be adjusted 360° on the horizontal plane



Ultra-slim

Ultra-slim design for narrow space



Accessories






Plastic insulation cover



Junction Box

Line Art



220-240V ~50/60Hz | 80Ra CRI | L70B50 15,000H | IP20 IP20 | IP20 IP44 | IP20 IP65 | Triac Dim | Non Dim | RoHS | CE

Model	Wattage	Lumen	CCT	Beam	IP Rate	Cut hole	Dimensions
SL001-C01	4.8W	400lm	2700K/3000K/4000K	100°	IP65	ϕ68mm	ϕ87x35mm
SL001-C02	4.8W	400lm	2700K/3000K/4000K	38°	IP44/IP20	ϕ68mm	ϕ87x24mm
SL001-C03	4.8W	400lm	2700K/3000K/4000K	38°	IP44/IP20	ϕ68mm	ϕ87x30mm

ROSEY



SL001-D02



SL001-D01



Application

Home, Office, Shop, Hotel etc.

Features:

- Front waterproof IP65
- Die-casting face ring with different color optional
- CCT3 and single color optional

Color of Bezels optional:



Black

Water-proof

Front waterproof IP65



CCT3

CCT3 changeable switch on back



Slim body

Slim body for narrow space installation



220-240V ~50/60Hz | 80 Ra CRI | L70B50 30,000H | IP20 IP65 | Triac Dim | Non Dim | RoHS | CE



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
SL001-D01	6.5W	600lm	CCT3	38°	ϕ75mm	ϕ85x30mm
SL001-D02	6.5W	600lm				ϕ85x30mm

ADAYO

SOFIA



SL001-A01 (Fixed)



SL001-A02 (Adjustable)



SL001-A03 (Adjustable)



Application

Home, Office, Shop, Hotel etc.

Features:

- Different colors bezels optional
- IP20/IP44/IP65 optional
- Screw free design save the installation cost
- Excellent dimming performance compatible with leading edge and trialing edge dimmers
- Can be installed directly into the insulation with the extra frame

Color of Bezels optional:



Water-proof

Front waterproof IP44/IP65 avaliable



CCT3

CCT3 changeable switch on back



Screw free

Screw free design save the installation cost



Accessories






Metal extra frame



Junction Box

220-240V ~50/60Hz | 80 Ra CRI | L70B50 25,000H | IP20 IP20 | IP20 IP44 | IP20 IP65 | Triac Dim | Non Dim | RoHS | CE



Model	Wattage	Lumen	CCT	Beam	IP Rate	Cut hole	Dimensions
SL001-A01D	7W	500lm	3000K/4000K/6500K	100°	IP65	ϕ68mm	ϕ87x47mm
SL001-A01C	7W	500lm	CCT3				
SL001-A03D	5W	400lm	3000K/4000K/6500K	38°	IP44	ϕ68mm	ϕ87x47mm
SL001-A03C	5W	400lm	CCT3				
SL001-A02D	5W	400lm	3000K/4000K/6500K	100°	IP20	ϕ68mm	ϕ87x47mm

AVALOR



SL001-E03D (Fixed)



SL001-E02D (Fixed)



SL001-E01D (Adjustable)



Application

Home, Office, Shop, Hotel etc.

Features:

- Different colors bezels optional
- IP44/IP65 optional
- Screw free design save the installation cost
- Excellent dimming performance compatible with leading edge and trialing edge dimmers
- Can be installed directly into the insulation with the extra frame

Color of Bezels optional:



Water-proof

Front waterproof IP44/IP65 avaliable



CCT3

CCT3 changeable switch on back



Screw free

Screw free design save the installation cost



Accessories






Metal extra frame



Junction Box

220-240V ~50/60Hz | 80 Ra CRI | L70B50 25,000H | IP20 IP44 | IP20 IP65 | Triac Dim | Non Dim | RoHS | CE



Model	Wattage	Lumen	CCT	Beam	IP Rate	Cut hole	Dimensions
SL001-E01D/E03D	5.5W	450lm	3000K/4000K/6500K	38°	IP44/IP65	ϕ68mm	ϕ87x45mm
SL001-E01C/E03D	5.5W	450lm	CCT3				
SL001-E02D	7W	560lm	3000K/4000K/6500K	100°	IP65	ϕ68mm	ϕ87x46mm
SL001-E02C	7W	560lm	CCT3				

AVALOR





IP65

SL001-F01D (Fixed)



IP44

SL001-F02D (Adjustable)




Application

Home, Office, Shop, Hotel etc.

Features:

- Different colors bezels optional
- IP44/IP65 optional
- Screw free design save the installation cost
- Excellent dimming performance compatible with leading edge and trialing edge dimmers
- Can be installed directly into the insulation with the extra frame

Color of Bezels optional:

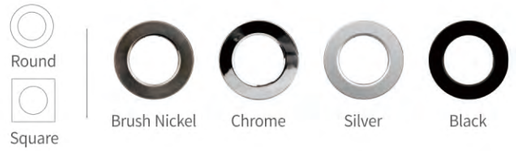

Water-proof

Front waterproof IP44/IP65 avaliable



CCT3

CCT3 changeable switch on back



Screw free

Screw free design save the installation cost



Accessories






Metal extra frame



Junction Box

220-240V ~50/60Hz | 80Ra CRI | L70B50 25,000H | IP20 IP44 | IP20 IP65 | Triac Dim | Non Dim | RoHS | CE



Model	Wattage	Lumen	CCT	Beam	IP Rate	Cut hole	Dimensions
SL001-F01D	5.5W	450lm	3000K/4000K/6500K	38°	IP65	ϕ68mm	ϕ87x45mm
SL001-F02D					IP44		
SL001-F03D	7W	560lm	3000K/4000K/6500K	38°	IP65	ϕ68mm	ϕ87x46mm
SL001-F04D					IP44		

CLIO



IP54

SL001-B03S



IP65

SL001-B01



IP44

SL001-B02



Application

Home, Office, Shop, Hotel etc.

Features:

- Different colors bezels can be changed easily
- IP44 and IP65 can be used into wet applications
- Tooling free design save the installation cost
- Excellent dimming performance compatible with leading edge and trialing edge dimmers
- Can be installed directly into the insulation with the extra frame

Color of Bezels optional:



Water-proof

IP44 and IP65 can be used into wet applications



CCT3

CCT3 changeable switch on back



Screw free

Screw free design save the installation cost



Accessories






Metal extra frame



Junction Box

220-240V ~50/60Hz | 80Ra CRI | L70B50 30,000H | IP20 IP44 | IP20 IP65 | Triac Dim | Non Dim | RoHS | CE



Model	Wattage	Lumen	CCT	Beam	IP Rate	Cut hole	Dimensions
SL001-B01D	10W	1000lm	3000K/4000K/6500K	100°	IP65	ϕ85mm	ϕ105x59mm
SL001-B01C	10W	1000lm	CCT3				
SL001-B02D	9W	750lm	3000K/4000K/6500K	38°	IP44		
SL001-B02C	9W	750lm	CCT3				
SL001-B03S	8W	640lm	3000K/4000K/6500K	100°	IP54		

DECO SPOT LIGHT

Modular design



PEGGY



SP001-A03B



SP001-A01B



SP001-A02B



SP001-A04B

Features:

- Surface mount design
- Easy to change the light source
- Dimmable and CCT optional
- White and black body optional
- 350° rotatable

350° Rotatable


Vertically tilt 90°, horizontally rotate 350°



Light Source Optional

Can be used with GU10 or module




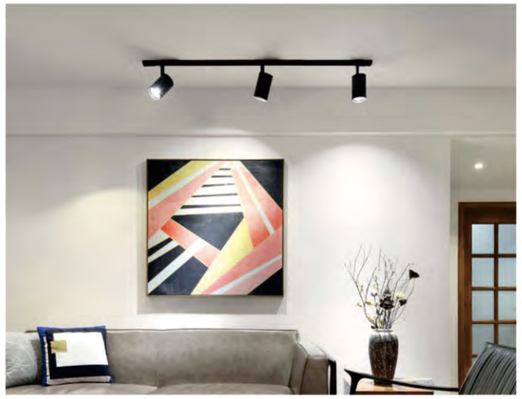

Application

Home, Office, Shop, Hotel etc.

Line Art

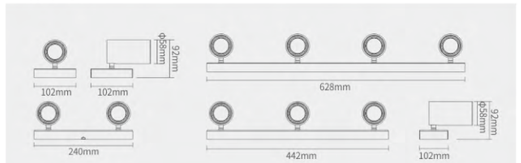

220-240V ~50/60Hz | 80Ra CRI | L70B50 25,000H | IP20 IP20 | Triac Dim | Non Dim | RoHS | CE

Model	Wattage	Lumen	CCT	Beam	LED	Dimensions
SP001-A01B	1x5W	450lm	3000K/4000K	38°	GU10/ Module	ϕ58x102x92mm
SP001-A02B	2x5W	900lm				ϕ58x240x92mm
SP001-A03B	3x5W	1350lm				ϕ58x442x92mm
SP001-A04B	4x5W	1800lm				ϕ58x628x92mm


EMILY



SP001-D03B



SP001-D01B

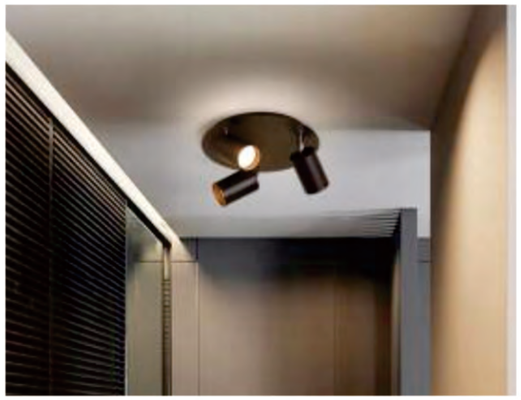


Application

Home, Office, Shop, Hotel etc.

Features:

- Surface mount design
- Easy to change the light source
- Dimmable and CCT optional
- White and black body optional
- 350° rotatable

Line Art

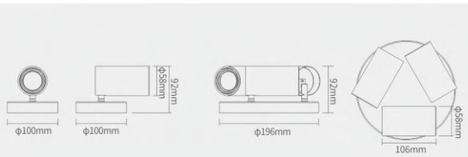

350° Rotatable

Vertically tilt 90°, horizontally rotate 350°



Light Source Optional

Can be used with GU10 or module



220-240V ~50/60Hz | 80 Ra CRI | L70B50 25,000H | IP20 IP20 | Triac Dim | Non Dim | RoHS | CE

Model	Wattage	Lumen	CCT	Beam	LED	Dimensions
SP003-D01B	1x5W	400lm	3000K/4000K/6500K	38°	GU10/ Module	ϕ58xϕ100x92mm
SP003-D03B	3x5W	1200lm				ϕ58xϕ196x92mm

ADAYO

DECO SPOT LIGHT
-BOX



GU10





SP001-E01W



SP001-E02W



SP001-E04W



SP001-E01B



SP001-E02B




SP001-E04B



Application

Home, Office, Shop, Hotel etc.

Line Art

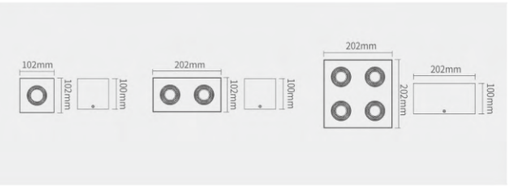

Features:

- Surface mount design
- Easy to change the light source
- Dimmable and CCT optional
- White and black body optional
- 36° tiltable

220-240V ~50/60Hz | 80Ra CRI | L70B50 25,000H | IP20 IP20 | Triac Dim | Non Dim | RoHS | CE

Model	Wattage	Lumen	CCT	Beam	Finish	Dimensions
SP001-E01W	1x5W	450lm	3000K/4000K	38°	White / Black	102x102x100mm
SP001-E02W	2x5W	900lm				202x102x100mm
SP001-E04W	4x5W	1800lm				202x202x100mm

MODULE

Module & Accessories Combination



MODULE & EXTENTION TRIM



220-240V ~50/60Hz | 80 Ra CRI | L70B50 25,000H | IP20 IP20 | Triac Dim | Non Dim | RoHS | CE


Model	Wattage	Lumen	CCT	Beam	Dimensions
SL003-A01S	6W	500lm	3000K/4000K	100°	ϕ50x43mm
SL003-A02S	6W	480lm	3000K/4000K	45°	ϕ50x43mm
SL003-A02C	6W	480lm	CCT2		

Steel Fixed Trim



Finish: White / Brushed Nickel
Material: Steel body
IP Rate: IP20
Size: ϕ80x27mm

ϕ68mm




Steel Adjustable Trim



Finish: White / Brushed Nickel
Material: Steel body
IP Rate: IP20
Size: ϕ84x25mm

ϕ68mm




Plastic Fixed Trim



Finish: White / Black
Material: Plastic body
IP Rate: IP20
Size: ϕ87x25mm

ϕ68mm




Plastic Adjustable Trim



Finish: White / Black
Material: Plastic body
IP Rate: IP20
Size: ϕ87x25mm

ϕ68mm




Aluminum Fixed Trim



Finish: White / Black
Material: Aluminum body
IP Rate: IP44
Size: ϕ81x30mm

ϕ68mm




Aluminum Adjustable Trim



Finish: White / Black
Material: Aluminum body
IP Rate: IP20
Size: ϕ82x25mm

ϕ68mm



GECO




SL003-GU10B01

SL003-GU10B02


SL003-GU10B03



Application

Restaurant, coffee shop, bar, home, office, shops, hotel etc.

This product works well with the below popular fixtures in Euro market.




The affordable LED spot solution

Features:

- Cob-like lens , more elegant looking
- Compatible with **Leading edge** and **trailing edge** dimmers
- Comply with ERP 2019/2020 and **new EMC** standard in 2022
- Dim and non dim optional
- Up to **100lm/W**@4000K version
- 2 years warranty






Model	Wattage	Lumen	CCT	Beam	IP Rate	Dimming	Dimensions
SL003-GU10B01	4.6W	420lm	2700K/3000K/4000K	38°	IP65	Triac Dim	ϕ49x55mm
SL003-GU10B02	4.6W	420lm	2700K/3000K/4000K	100°	IP65	Triac Dim	
SL003-GU10B03	4.6W	420lm	CCT2	38°	IP20	Triac Dim	

ADAYO

RESIDENTIAL

LED Downlight

FLYING Backlit downlight ..... 081 - 081
CREPE Sidelit downlight ..... 082 - 082
BAGEL Cabinet light ..... 083 - 084

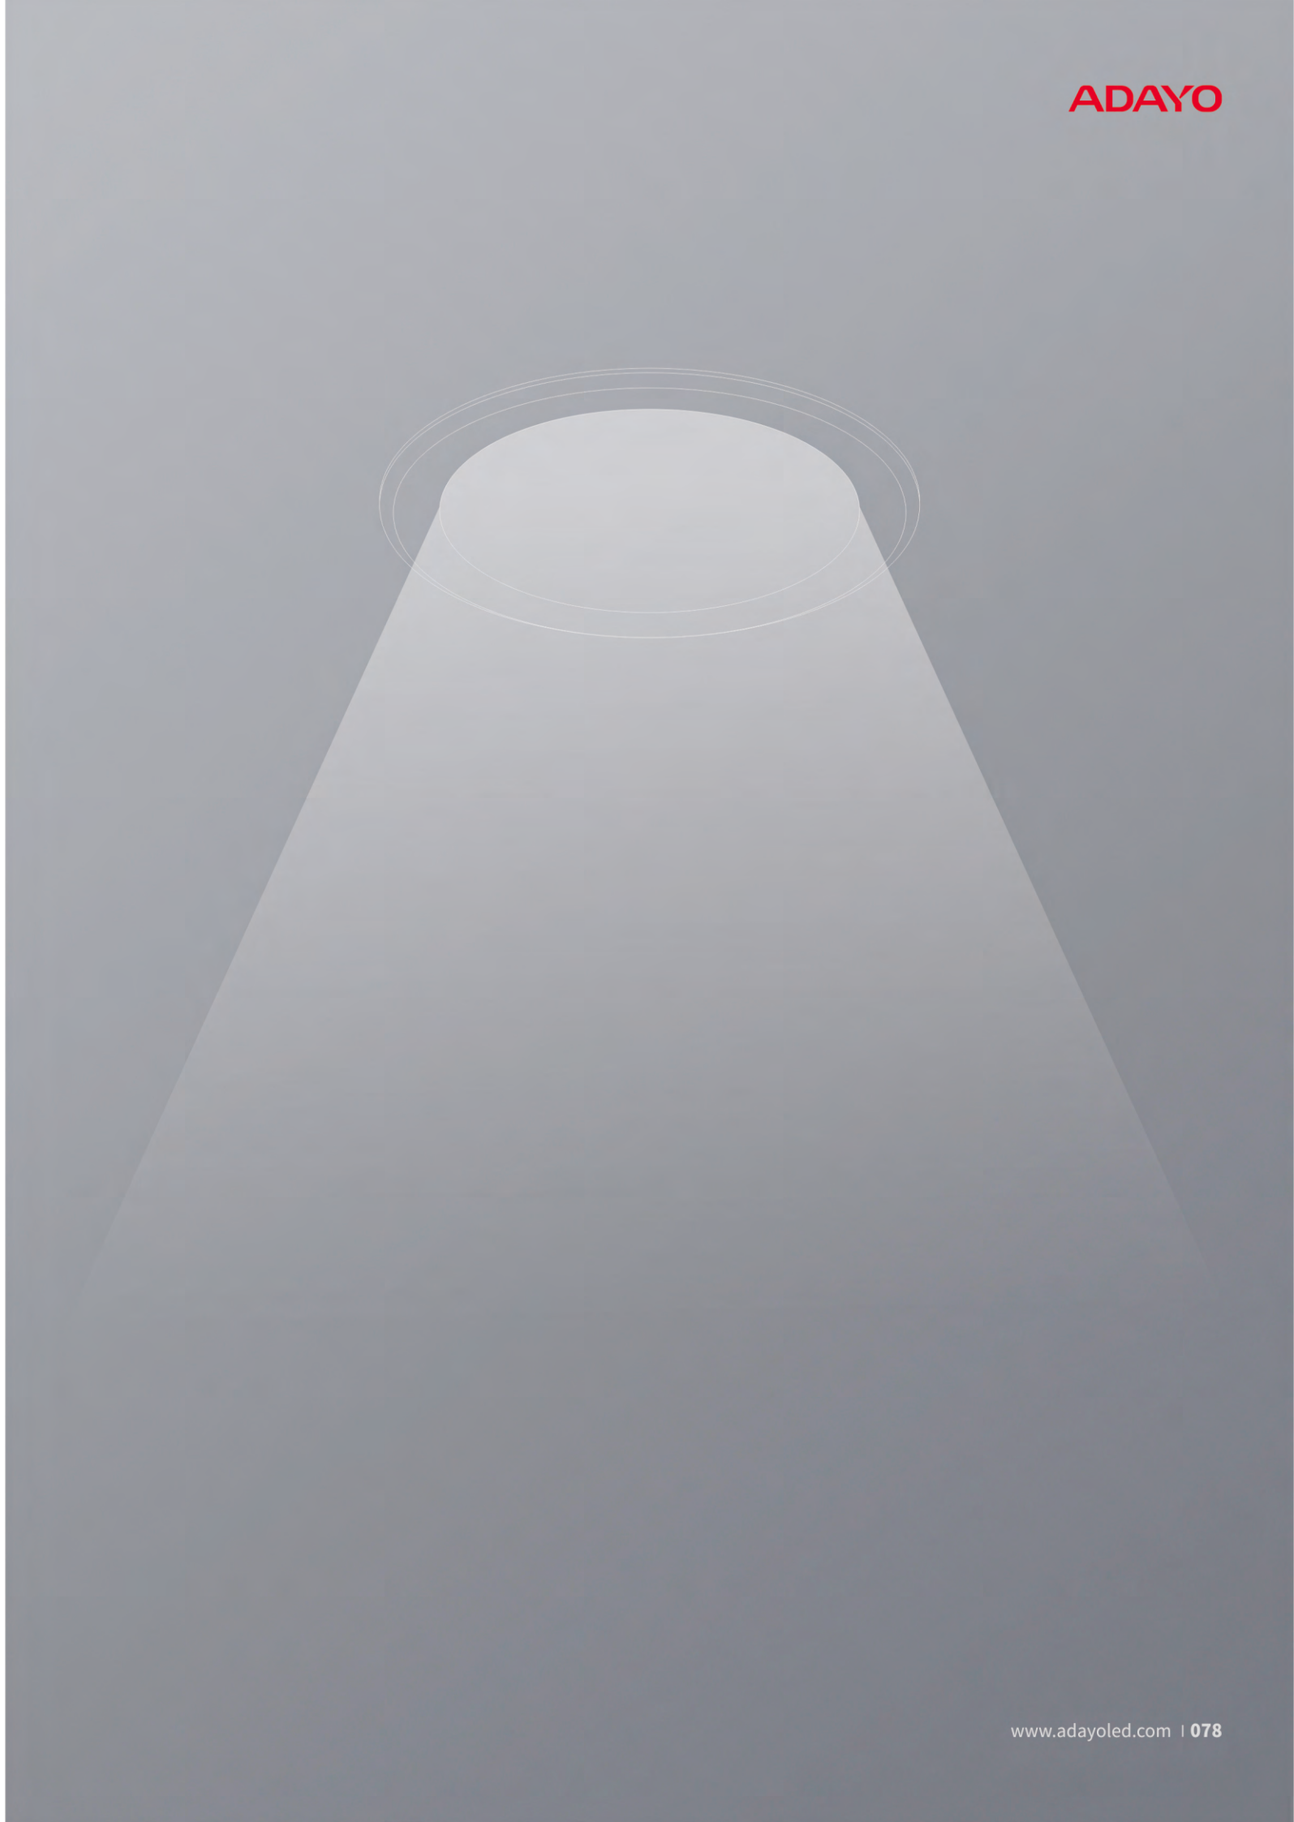

Residential Downlight

■ FLYING - Backlit


DL002-A25
081


DL002-A30
081


DL002-A35
081


DL002-A40
081


DL002-A50
081


DL002-A60
081


DL002-A80
081

■ CREPE - Sidelit


DL001-075R
082


DL001-100R
082


DL001-125R
082


DL001-150R
082


DL001-220R
082


DL001-075S
082


DL001-110S
082


DL001-125S
082


DL001-150S
082


DL001-220S
082

■ BAGEL - Cabinet light


DL008-A
083


DL008-B
083

ADAYO

FLYING






Application

Corridor, Aisle, Circulation area

Features

- The smooth housing ensures uniform heat dissipation, easy to install and easy to carry.
- A variety of sizes are available.
- Integral spring fixture retention clamps are strong and flexible and can bend up to 150 degrees making it much easier to install and mount on the ceiling.
- Solid-state construction for high shock and vibration resistance. Suitable for home ceiling and Type CE Rated – this light is perfect fit for installation in slopes and locations with less ceiling clearance.

220-240V ~50/60Hz | 80 Ra CRI | L70B50 15,000H | IP20 IP20 | Non Dim | RoHS | CE



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL002-A25	3.5W	250lm	3000K/4000K/6500K	110°	ϕ75mm	ϕ94x48mm
DL002-A30	5W	360lm			ϕ80mm	ϕ98x48mm
DL002-A35	6.7W	510lm			ϕ95mm	ϕ108x48mm
DL002-A40	9W	680lm			ϕ105mm	ϕ125x48mm
DL002-A50	12W	1000lm			ϕ125mm	ϕ143x48mm
DL002-A60	15W	1300lm			ϕ150mm	ϕ167x48mm
DL002-A80	20W	1800lm			ϕ200mm	ϕ215x48mm

CREPE



Features

- Integrated slim design
- No flicker, comfortable and natural light
- Intelligent driver with short-circuit protection, improve safety performance
- High-quality springs with plastic protective sleeves, ensure installation convenient and safe


Built-in driver


Easy installation



Ultra-slim

Ultra-slim design for narrow space




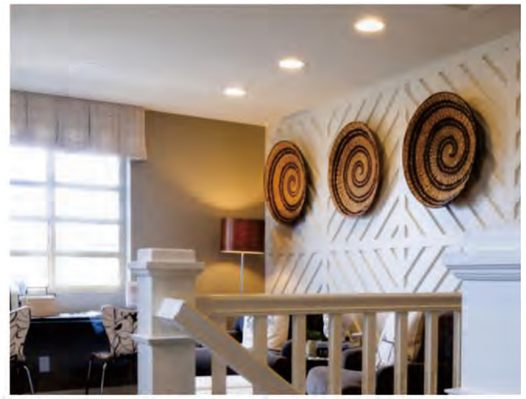

Application

Home, Office, Shop, Hotel etc.

Line Art

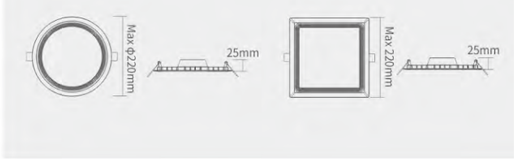

220-240V ~50/60Hz | 80 Ra CRI | L70B50 15,000H | IP20 IP20 | Non Dim | RoHS | CE

Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL001-075R	3W	200lm	3000K/4000K/6500K	110°	ϕ75mm	ϕ93x25mm
DL001-100R	6W	350lm			ϕ100mm	ϕ118x25mm
DL001-125R	9W	700lm			ϕ125mm	ϕ143x25mm
DL001-150R	12W	900lm			ϕ150mm	ϕ168x25mm
DL001-220R	18W	1600lm			ϕ200mm	ϕ220x47mm
DL001-075S	3W	200lm	3000K/4000K/6500K	110°	75x75mm	93x47mm
DL001-100S	6W	350lm			100x100mm	118x47mm
DL001-125S	9W	700lm			125x125mm	143x47mm
DL001-150S	12W	900lm			150x150mm	168x47mm
DL001-220S	18W	1600lm			200x200mm	220x47mm

BAGEL



DL008-A
(White / Recessed)



DL008-B
(White /
Surface-mounted)



DL008-B
(Brushed Nickel /
Surface-mounted)



DL008-A
(Brushed Nickel /
Recessed)

Features

- Slim body, 24mm height
- Constant current output
- 6pcs with a junction box and one driver
- White and brushed nickel color optional
- Easy wiring and installing

Ultra-slim

Ultra-slim design for narrow space



2 Installations

2 installation: Recessed and surface-mounted



External Drive

6pcs with a junction box and one driver





Application


Wardrobe, Cupboard, Bookcase, Cabinet.

Accessories



Driver & Junction box

Line Art



Model	Wattage	Lumen	CCT	Beam	Finish	Installation	Cut hole	Dimensions
DL008-A	2.5W	190lm	3000K	100°	White/Brushed Nickel	Recessed	ϕ63mm	ϕ68x11mm
DL008-B	2.5W	190lm	3000K	100°	White/Brushed Nickel	Surface-mounted	/	ϕ68x11mm

ADAYO

LED CEILING AND WALL LIGHT

■ CD Mirror



CL002-A11
087



CL002-B15
087



CL002-C24
087



CL005-D12
088

■ Muffin



CL003-A01
089

■ Adeline



CL001-300
092



CL001-300
092

ADAYO

CD MIRROR



Surface-mounted



Pendant (with long pole)



Pendant (with metal wire)




Application

Home, Office, Hotel, Gym reception room, Classroom, Restaurant

Features

- Narrow trim design
- White and black are available
- 2 installation : Surface-mounted and pendant
- 5 years warranty



Model	Wattage	Lumen	CCT	Efficacy	Beam	Dimensions
CL002-A11	15W	1500lm	3000K/4000K/5000K	100lm/W	120°	ϕ300x80mm
CL002-A15	25W	2500lm				ϕ480x80mm
CL002-A24	50W	5000lm				ϕ600x80mm

CD MIRROR





White



Black



Application


Home, Office, Shop, Hotel etc.

Features

- Narrow trim design
- White and black are available
- 2 installation : Surface-mounted and pendant
- UGR 19
- 5 years warranty

Ultra-slim


Ultra-slim design for narrow space



2 installations

Surface-mounted and pendant





Model	Wattage	Lumen	CCT	Beam	Finish	Dimensions
CL002-D12	15W	1500lm	3000K/4000K/5000K	120°	Black/White	ϕ300x551mm
CL002-D16	25W	2500lm				ϕ480x551mm
CL002-D24	40W	4000lm				ϕ600x551mm

MUFFIN








Application

Corridor, Aisle, Circulation area

Features

- High impact resistant polycarbonate Body
- Polycarbonate Opal diffuser
- 3 trims : White, Chrome, Brushed Chrome
- CCT3, IP65
- Microwave Sensor & Emergency Version

220-240V ~50/60Hz | 80 Ra CRI | L70B50 25,000H | IP20 IP65 | Non Dim | RoHS | CE



Model	Wattage	Lumen	CCT	Efficacy	Beam	Dimensions
CL003-A01	10W	900lm	3000K/4000K/5000K	90lm/W	100°	ϕ330x94mm
CL003-B01	15W	1300lm				

ADAYO

ADELINE





Wood



White+Wood



White



Black



Application

Bedroom, Livingroom, Corridor, Aisle, Circulation area

Three verision optional



On / Off version



RF Control version






Triac dimming+Switch CCT version

Features

- Plastic frame with wood, white and black finishing. Unique colors clashing design is available
- PMMA diffuser, light transmittance is up to 80%
- Switch CCT 2700K - 4000K - 6500K
- 25000 hours lifespan, high lighting efficiency 90lm/w
- CE, RoHs and new ERP 2019/2015 compliant
- WiFi function is optional





Model	Wattage	Lumen	CCT	Efficacy	Beam	Dimensions
CL001-300	21W	1900lm	2700K/4000K/6500K	90lm/W	100°	ϕ300x50mm
CL001-450	28W	2800lm	2700K/4000K/6500K	100lm/W	100°	ϕ450x60mm

SMART LIGHTING

works with the Google Assistant · works with alexa · Works with Apple HomeKit

Product Index

■ Smart Light Source


WL001-GU10101
097


WL001-GU10201
098


WL001-A60201
099


WL001-BR3001
100


WL001-GUM1101
101

■ Smart Down Light


WL001-NAD401
104


WL001-G3A101
105


WL001-G3A301
105


WL001-D1701
106

■ Smart Ceiling Light


WCL002-300
107


WPDL001-606D
108


CL003-W11
109


CL004-W12
110

■ Smart Fire Rated Down Light


WL001-FG3A03
111


WL001-D36A03
112



Smart Home System



LED Smart Products




Technical comparison

	Bluetooth	zigbee	Wi Fi	Sig mesh
Communication	Independent	Mesh	Network	Mesh
Long range control	/	Need Gateway	/	Need Gateway
Devices connect number	8	<10-100	<10-100	Over 150
Coverage area	<10m	10-75m	10-50m	Theoretically no limit with 2 Devices in 100m
PowerConsumer	Low	Medium	Hight	Low
Setup	Simple	Complex	Simple	Simple
Cost	Cheap	Expensive	Expensive	Cheap
Network size	Small	Medium	Medium	Big
Response speed	Fast	Slow	Slow	Fast
Security level	High	High	Low	High
Network Stability	Stable	Stable	Unstable	Stable

Features:

- Voice & APP control, No gateway required with WIFI devices
- Dim, CCT, RGBCW function optional
- 16,000,000 colors in RGB mode
- Work with Google Assistant, Amazon Alexa
- Work with Sensor, Remote control simplelifes operation in Bluetooth devices

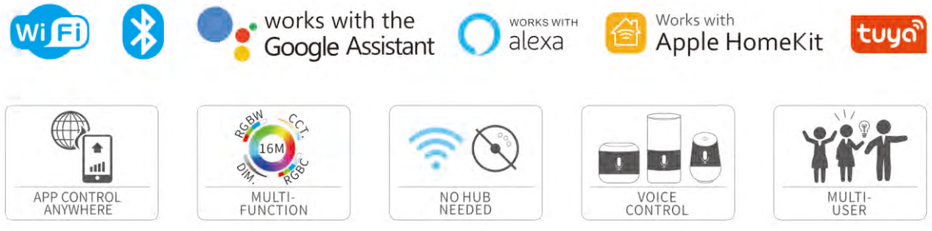

SMART GU101

works with the Google Assistant · WORKS WITH alexa · Works with Tuya · Wi Fi · Bluetooth






Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.

Features:

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music
- AC230V

80 Ra CRI · 15,000H · 100 Instant · APP Dim · IP20 · RoHS · CE



Model	Wattage	Lumen	CCT	Beam	Dimensions
WL001-GU10102	4.8W	350lm	2700K~6500K	100°	ϕ50x60mm
WL001-GU10105			2700K~6500K+RGB		
BL001-GU10102	4.8W	350lm	2700K~6500K	100°	ϕ50x60mm
BL001-GU10105			2700K~6500K+RGB		

SMART GU102

works with the Google Assistant · WORKS WITH alexa · Works with Tuya · Wi Fi · Bluetooth






Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.

Features:

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music
- AC230V

80 Ra CRI · 15,000H · 100 Instant · APP Dim · IP20 · RoHS · CE



Model	Wattage	Lumen	CCT	Beam	Dimensions
WL001-GU10202	4.8W	350lm	2700K~6500K	38°	ϕ50x54mm
WL001-GU10205			2700K~6500K+RGB		
BL001-GU10202	4.8W	350lm	2700K~6500K	38°	ϕ50x54mm
BL001-GU10205			2700K~6500K+RGB		

SMART BULB

works with the Google Assistant · WORKS WITH alexa · Works with Tuya

Wi Fi · Bluetooth




BASE: E27



BASE: B22



BASE: E26

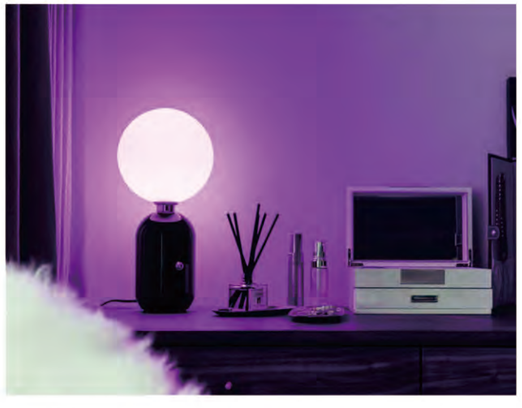

Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.

Features:

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music
- AC100V / AC230V optional



80 Ra CRI · 15,000H · 100 Instant · APP Dim · IP20 · RoHS · FC CE

Model	Wattage	Lumen	CCT	Beam	Base type	Dimensions
WL001-A60202	9W	806lm	2700K~6500K	180°	E26/E27/B22	ϕ60x119mm
WL001-A60205			2200K~6500K+RGB			
BL001-A60202	9W	806lm	2700K~6500K	180°	E26/E27/B22	ϕ60x119mm
BL001-A60205			2700K~6500K+RGB			

SMART BR30

works with the Google Assistant · WORKS WITH alexa · Works with Tuya

Wi Fi · Bluetooth






Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.

Features:

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music



80 Ra CRI · 15,000H · 100 Instant · APP Dim · IP20 · RoHS · FC

Model	Wattage	Lumen	CCT	Beam	Base type	Dimensions
WL001-BR3002	12W	1200lm	2700K~6500K	120°	E26	ϕ95x128mm
WL001-BR3005			2700K~6500K+RGB			
BL001-BR3002	12W	1200lm	2700K~6500K	120°	E26	ϕ95x128mm
BL001-BR3005			2700K~6500K+RGB			

SMART GUM1

works with the Google Assistant · WORKS WITH alexa · Works with Tuya

WiFi · Bluetooth



WL001-GUM1101



WL001-GUM1201




Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.

Features:

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music
- Replace wifi GU10 easily
- AC230V

80Ra CRI · 15,000H · 100 Instant · APP Dim · IP20 · RoHS · CE



Model	Wattage	Lumen	CCT	Beam	Dimensions
WL001-GUM1102	6W	500lm	2700K~6500K	100°	ф50x43mm
WL001-GUM1105			2700K~6500K+RGB		
BL001-GUM1102	6W	500lm	2700K~6500K	100°	ф50x43mm
BL001-GUM1105			2700K~6500K+RGB		
WL001-GUM1202	6W	500lm	2700K~6500K	38°	ф50x43mm
WL001-GUM1205			2700K~6500K+RGB		
BL001-GUM1202	6W	500lm	2700K~6500K	38°	ф50x43mm
BL001-GUM1205			2700K~6500K+RGB		

ADAYO

SMART DOWN LIGHT-NA

works with the Google Assistant · WORKS WITH alexa · Works with Tuya

Wi Fi · Bluetooth






Features:

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music

Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.

80 Ra CRI · 15,000H · Instant · APP Dim · IP20 · RoHS · FC



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
WL001-NAD402	10W	800-850lm	2700K~6500K	60°	ϕ100mm	ϕ140x56mm
WL001-NAD405			2700K~6500K+RGB			
BL001-NAD402	10W	800-850lm	2700K~6500K	60°	ϕ100mm	ϕ140x56mm
BL001-NAD405			2700K~6500K+RGB			
WL001-NAD602	15W	1200-1275lm	2700K~6500K	60°	ϕ150mm	ϕ186x56mm
WL001-NAD605			2700K~6500K+RGB			
BL001-NAD602	15W	1200-1275lm	2700K~6500K	60°	ϕ150mm	ϕ186x56mm
BL001-NAD605			2700K~6500K+RGB			

SMART DOWN LIGHT-G3A1

works with the Google Assistant · WORKS WITH alexa · Works with Tuya · Wi Fi · Bluetooth



WL001-G3A1



WL001-G3A3




Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.

Features:

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music

80 Ra CRI · 15,000H · Instant · APP Dim · IP65 · RoHS · CE



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
WL001-G3A102	4.8W	320lm	2700K~6500K	100°	ϕ70mm	ϕ86x47mm
WL001-G3A105			2700K~6500K+RGB			
BL001-G3A102	4.8W	320lm	2700K~6500K	100°	ϕ70mm	ϕ86x47mm
BL001-G3A105			2700K~6500K+RGB			
WL001-G3A302	4.8W	320lm	2700K~6500K	38°	ϕ70mm	ϕ86x47mm
WL001-G3A305			2700K~6500K+RGB			
BL001-G3A302	4.8W	320lm	2700K~6500K	38°	ϕ70mm	ϕ86x47mm
BL001-G3A305			2700K~6500K+RGB			

SMART DOWN LIGHT-D1701

works with the Google Assistant · WORKS WITH alexa · Works with Tuya · Wi Fi · Bluetooth






Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.

Features:

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music

80 Ra CRI · 15,000H · Instant · APP Dim · IP20 · RoHS · CE



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
WL001-D1702	15W	1350lm	2700K~6500K	100°	ϕ150mm	ϕ170x48mm
WL001-D1705			2700K~6500K+RGB			
BL001-D1702	15W	1350lm	2700K~6500K	100°	ϕ150mm	ϕ170x48mm
BL001-D1705			2700K~6500K+RGB			

SMART CEILING LIGHT

works with the Google Assistant · WORKS WITH alexa · Works with Tuya · Wi Fi · Bluetooth





Wood



White+Wood



White



Black




Application

Bedroom, Livingroom, Corridor, Aisle, Circulation area

Features:

- Plastic frame with wood, white and black finishing.
  Unique colors clashing design is available
- PMMA diffuser, light transmittance is up to 80%
- 25000 hours lifespan, high lighting efficiency 90lm/w
- CE, RoHs and new ERP 2019/2015 compliant
- WiFi function is optional

220-240V ~50/60Hz · 90 Ra CRI · 25,000H · IP20 · APP Dim · ENERG · RoHS · CE



Model	Wattage	Lumen	Efficacy	CCT	Beam	Dimensions
WCL002-300	21W	1900lm	90lm/W	2700K-6500K	100°	ϕ300x50mm
WCL002-450	28W	2800lm	100lm/W			ϕ450x60mm
BCL002-300	21W	1900lm	90lm/W	2700K-6500K	100°	ϕ300x50mm
BCL002-450	28W	2800lm	100lm/W			ϕ450x60mm

ADAYO

SMART CEILING LIGHT

works with the Google Assistant · WORKS WITH alexa · Works with Tuya · Wi Fi · Bluetooth




Features:

- Adjustable buckle cut size Φ 50-260mm
- Dimming , non-dimming, multi-power optional
- Black, silver, chrome and brushed nickel bezel optional
- Slim body height 22mm

Cut Out

For ϕ50mm-ϕ260mm cut hole



Ultra-slim

The ultra-slim design satisfies a narrow space with more elegance





Application


Corridor, Aisle, Circulation area

Color of Bezels optional:



Black · Brushed Nickel · Silver · Chrome

220-240V ~50/60Hz · 80 Ra CRI · 30,000H · 100 Instant · IP20 · APP Dim · ENERG · RoHS · CE



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
WPDL001-606D	6W	480lm	2700K-6500K	110°	ϕ50-125mm	ϕ165x22mm
WPDL001-612D	12W	960lm			ϕ50-125mm	ϕ165x22mm
WPDL001-818D	18W	1620lm			ϕ65-185mm	ϕ217x22mm
WPDL001-1121D	21W	1900lm			ϕ65-260mm	ϕ290x22mm
WPDL001-1123D	23W	2100lm			ϕ65-260mm	ϕ290x22mm
BPDL001-606D	6W	480lm	2700K-6500K	110°	ϕ50-125mm	ϕ165x22mm
BPDL001-612D	12W	960lm			ϕ50-125mm	ϕ165x22mm
BPDL001-818D	18W	1620lm			ϕ65-185mm	ϕ217x22mm
BPDL001-1121D	21W	1900lm			ϕ65-260mm	ϕ290x22mm
BPDL001-1123D	23W	2100lm			ϕ65-260mm	ϕ290x22mm

SMART CEILING LIGHT

works with the Google Assistant · WORKS WITH alexa · Works with Tuya

Wi Fi · Bluetooth



Surface-mounted



Pendant (with long pole)



Pendant (with metal wire)




Application

Home, Office, Hotel, Gym reception room, Classroom, Restaurant

Features:

- Narrow trim design
- White and black are available
- 2 installation : Surface-mounted and pendant
- 5 years warranty

220-240V ~50/60Hz · 90 Ra CRI · 25,000H · IP20 · APP Dim · ENERG · RoHS · CE



Model	Wattage	Lumen	CCT	Efficacy	Beam	Dimensions
CL003-W11	15W	1500lm	2700K-6500K	100lm/W	120°	ϕ300x80mm
CL003-W15	25W	2000lm				ϕ480x80mm
CL003-W24	50W	4000lm				ϕ600x80mm
CL003-B11	15W	1500lm	2700K-6500K	100lm/W	120°	ϕ300x80mm
CL003-B15	25W	2000lm				ϕ480x80mm
CL003-B24	50W	4000lm				ϕ600x80mm

SMART CEILING LIGHT

works with the Google Assistant · WORKS WITH alexa · Works with Tuya

Wi Fi · Bluetooth



White



Black

Features:

- Narrow trim design
- White and black are available
- 2 installation : Surface-mounted and pendant
- UGR 19
- 5 years warranty



Application

Home, Office, Hotel, Gym reception room, Classroom, Restaurant

Ultra-slim


Ultra-slim design for narrow space



2 installations

Surface-mounted and pendant





220-240V ~50/60Hz · 80 Ra CRI · 50,000H · 100% Instant · IP20 · APP Dim · ENERG · RoHS · CE

Model	Wattage	Lumen	CCT	Beam	Finish	Dimensions
CL004-W12	15W	1500lm	2700K-6500K	120°	Black/White	ϕ300x551mm
CL004-W16	25W	2000lm				ϕ480x551mm
CL004-W24	40W	4000lm				ϕ600x551mm
CL004-B12	15W	1500lm	2700K-6500K	120°	Black/White	ϕ300x551mm
CL004-B16	25W	2000lm				ϕ480x551mm
CL004-B24	40W	4000lm				ϕ600x551mm

SMART FIRE RATED DOWNLIGHT

works with the Google Assistant · WORKS WITH alexa · Works with Tuya · Wi Fi · Bluetooth





Features:

- Smart Life APP control, no gateway required
- Dim and CCT
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Fire rated 30', 60', 90' .
- Tooling free design

Application

Home, Hotels

Color of Bezels optional:



Brushed Nickel · Chrome · White · Black

Fire-rated

Adopt flame retardant material, safe and secure



Tool-free

Tool-free design save the installation cost




Insulation Cover

Can be covered by insulation directly



220-240V ~50/60Hz · 80 Ra CRI · 50,000H · 100 Instant · APP Dim · IP65 · 30 60 90 · RoHS · CE




Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
WL001-FG3A03 BL001-FG3A03	8.5W	700lm	3000K~6500K	60°	ϕ70mm	ϕ88x65mm

ADAYO

SMART 360° FIRE RATED DOWNLIGHT

works with the Google Assistant · WORKS WITH alexa · Works with Tuya · Wi Fi · Bluetooth



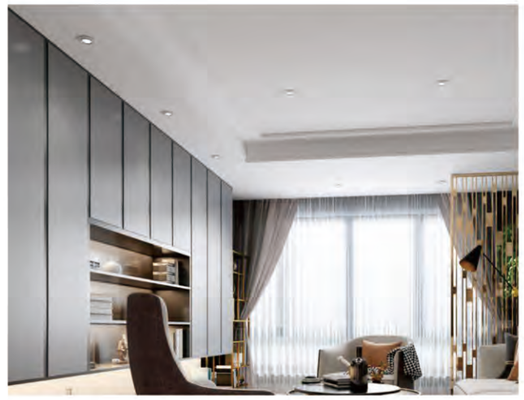

Features:

- Smart Life APP control, no gateway required
- Dim and CCT , 360° rotation
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Fire rated 30', 60', 90'
- Tooling free design

Application

Home, Hotels

Three color finishing optional



Black · Silver · White

Fire-rated

Adopt flame retardant material, safe and secure



360° Rotation

Can be adjusted angle according to the subject



Tool-free

Tool-free design save the installation cost




Insulation Cover

Can be covered by insulation directly



220-240V ~50/60Hz · 80 Ra CRI · 25,000H · 100 Instant · APP Dim · IP65 · 30 60 90 · RoHS · CE



Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
WL001-D36A03 BL001-D36A03	8.5W	720lm	3000K-6500K	38°	Black/White/Silver	ϕ85mm	ϕ96x40mm