



ADAYO

2022-2023 CATALOGUE

OEM&ODM
MANUFACTURER
FOR LED LIGHTING

ADAYO

T: +86-752-5300 980
+86-752-5300 979
+86-752-5300 977
+86-752-5300 601
F: +86-752-5300 099
E: info@adayoled.com
A: Foryou Industrial Park Area B,
No.1 North Shangxia Road,
Dongjiang Hi-tech industry Park,
Huizhou, Guangdong Province,P R China
**HUIZHOU FORYOU OPTOELECTRONICS
TECHNOLOGY CO., LTD.**



adayo-led



adayoled

www.adayoled.com

INDEX

■ COMMERCIAL

LED Spotlight

ROLAND	360° Rotatable recessed spotlight	011 - 014
JAMES	360° ECO Rotatable recessed spotlight	015 - 016
COREIN	Module recessed spotlight	017 - 020
MIRANDA	Deep recessed spotlight G1.5	021 - 022
MINI EYES	Mini recessed spotlight	023 - 026
GU10 SPOT	GU10 spotlight	027 - 028

LED Downlight

PIZZA	Multi-fit downlight	033 - 036
CAKE	Metal slim downlight	037 - 038
EIFFEL	Module downlight	039 - 045
DE GAULLIST	Deep recessed downlight UGR19	046 - 046
MAGIC HAT	Deep recessed downlight UGR22	047 - 048
CLOVER	Fire-rated downlight	049 - 054

■ RESIDENTIAL

LED Spotlight

AMBER	DIY slim recessed spot light	060 - 060
ROSEY	Metal slim recessed spot light	061 - 062
SOFIA	DIY G3 recessed spot light	063 - 063
AVALOR	DIY G4 recessed spot light	064 - 065
CLIO	DIY high power recessed spot light	066 - 066
PEGGY/EMILY/BOX	Surface mounted spot light	067 - 072
MODULE	Module & fixture	073 - 074
GEKO	GU10	075 - 076

LED Downlight

FLYING	Backlit downlight	081 - 081
CREPE	Sidelit downlight	082 - 082
BAGEL	Cabinet light	083 - 084

■ LED CEILING AND WALL LIGHT

ADELINE/ MUFFIN/CD MIRROR	LED Ceiling light	087 - 094
--------------------------------------	-------------------	-----------

■ LED SMART LIGHT

Smart Ambient Light	099 - 102
Smart Light Source	103 - 106
Smart Down light	107 - 110
Smart Ceiling Light	111 - 114
Smart Fire Rate Down Light	115 - 116

Commercial Spotlight

■ ROLAND - 360° Rotatable



SL360-A01 012 SL360-B01 012 SL360-A02 013 SL360-B02 013 SL361D-A01 015 SL361-B01 016

■ JAMES - 360° Eco rotatable 

■ COREIN - Module 



SL005-A01 019 SL005-B01 019 SL005-FR01 019 SL005-FR02 019 SL005-FR03 019 SL005-FR04 019



SL005-FS01 019 SL005-FS02 019

■ MIRANDA - Deep recessed G1.5



SL015-W065 021 SL015-W044 021 SL015-N065 021 SL015-N044 021

■ MINI EYES



SL004-A01 024 SL004-A03 025 SL003-GU10-C05 027

■ GU10 

Commercial Downlight

■ PIZZA - Multi-fit 



DL003-D06 034 DL003-D08 034 DL003-D12 034 DL003-P08 035 PDL003-E08 036

■ CAKE - Metal slim



DL007-D30 037 DL007-D40 037 DL007-D60 037 DL007-D80 037

■ EIFFEL - Module 



DL10-A30 041 DL10-B30 042 DL10-C30 043 DL10-D30 044 DL10-G60 045

■ DE GAULLIST - Deep Recessed Downlight



DL005-DA40K 046 DL005-DA60K 046 DL005-DA80K 046 DV60B 047 DV80B 047

■ MAGIC HAT

■ CLOVER - Fire-rated



SL002-C01 050 SL002-B01 051 SL002-A03 052 SL360-A03F 053 SL361-A03F 054

Residential Spotlight

■ AMBER - DIY slim



SL001-C01 060 SL001-C02 060 SL001-C03 060 SL001-D01 061 SL001-D02 061

■ ROSEY - Metal slim



SL001-D01 061 SL001-D02 061

■ SOFIA - DIY G3



SL001-A01 063 SL001-A02 063 SL001-A03 063 SL001-B01 064 SL001-B02 066 SL001-B03S 066

■ CLIO - DIY high power **New**



SL001-B01 064 SL001-B02 066

■ AVALOR - DIY G4 **New**



SL001-E01 064 SL001-E02 064 SL001-E03 064 SL001-E04 065 SL001-E05 065

■ PEGGY / EMILY / BOX - Surface mounted



SP001-A01B 068 SP001-A02B 068 SP001-A03B 068 SP001-A04B 068



SP001-D01B 069 SP001-D03B 069 SP001-E01W 072 SP001-E02W 072 SP001-E04W 072

■ Module & Fixture **New**



SL003-A01 074 SL003-B01 074 SL003-C01 074 SL003-GU10B01 075 SL003-GU10B02 075 SL003-GU10B03 075

■ GECCO - GU10 **New**



SL003-GU10B01 075 SL003-GU10B02 075 SL003-GU10B03 075

Residential Downlight

■ FLYING - Backlit



DL002-A25 081 DL002-A30 081 DL002-A35 081 DL002-A40 081 DL002-A60 081 DL002-A80 081

■ CREPE - Sidelit



DL001-075R 082 DL001-100R 082 DL001-125R 082 DL001-150R 082 DL001-220R 082



DL001-075S 082 DL001-110S 082 DL001-125S 082 DL001-150S 082 DL001-220S 082

■ BAGEL - Cabinet light



DL008-A01 083 DL008-B01 083

LED Ceiling and wall light

■ Adeline **New**



CL001-300 088

■ Muffin **New**



CL001-300 088

■ CD Mirror **New**



CL003-A01 089



CL004-A 091



CL002-A11 093



CL002-B15 093



CL005-D12 094



▲ Foryou Industrial Park

PROFILE

Foryou Corporation

Established in **1993**, listed in **2017**
 Leading in auto electronics of China
2,000+ R&D engineers
 Auto Industry Quality Control System
560,000 square meters industrial park

Top 100 Electronic Information Enterprises Of China
Top 100 Enterprises In Guangdong
Top 500 Manufacturers of China
500 Most Influential Brands of Asian

About us



Huizhou Foryou Optoelectronic Technology Co., Ltd (ADAYO lighting) is a wholly-owned subsidiary of Foryou corporation, which entered the LED packaging industry in 2006, and established in 2012 with registered capital of 32 million US dollar. There are three business lines: LED package, LED high power driver and LED lighting. We are good at ODM, OEM projects and also can provide self-developed products for every target market.



Our lab covers an area of 1200m² which complies international standard and has more than 100 test equipments. Thus, we can do safety test, reliability test, photoelectric parameter test, dropping and shaking test, EMI and EMC test. Our factory is qualified with ISO9001, ISO14001 and the products can pass CE/CB/FCC/UL/SAA/BS476-20/BS476-21 and other international certifications.



Our professional sales team can provide consulting sales services for different markets; Our R&D team with more than 60 people, one third of them with more than 20 years of experience in the lighting industry. A new range of product will be launched every one month in average.


The rigorous quality team, controls quality with industry standard from the incoming materials, production, and finished products providing strong quality support for your sales.



There are more than 300 workers and 50 production lines of LED package, LED high power driver and LED lighting, including 30 automatic and semi-automatic lines, with a monthly capacity of 2 million pcs LED down light, LED ceiling light, LED spot light, LED smart light.

ADAYO lighting adheres to the spirit of hard work in the manufacturing industry, persists in reform and innovation, and joins hands with customers and peers from all walks of life to seek common development and win-win cooperation.

Certification

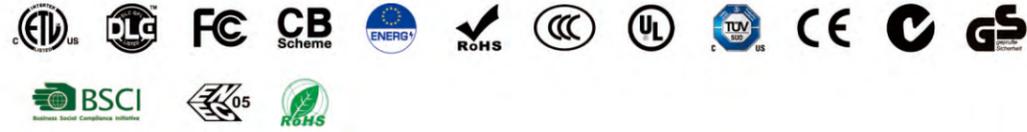


Main Business



LED Lighting




LED Package

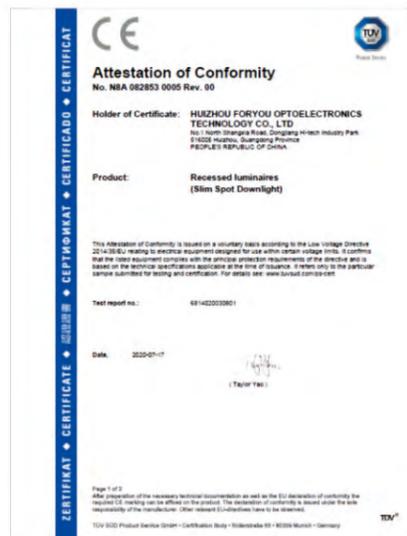

COMMERCIAL

LED Spotlight

ROLAND	360° Rotatable recessed spotlight	011 - 014
JAMES	360° ECO Rotatable recessed spotlight	015 - 016
COREIN	Module recessed spotlight	017 - 020
MIRANDA	Deep recessed spotlight G1.5	021 - 022
MINI EYES	Mini recessed spotlight	023 - 026
GU10 SPOT	GU10 spotlight	027 - 028

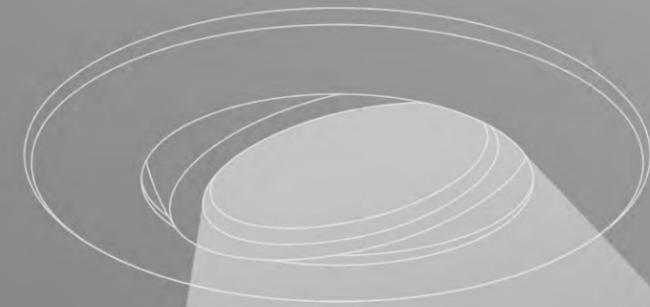

Commercial Spotlight

■ ROLAND - 360° Rotatable



SL360-A01
012



SL360-B01
012



SL360-A02
013



SL360-B02
013

■ JAMES - 360° Eco rotatable 



SL361-A01
015



SL361-B01
016

■ COREIN - Module 



SL005-A01
019



SL005-B01
019



SL005-FR01
019



SL005-FR02
019



SL005-FR03
019



SL005-FR04
019



SL005-FS01
019



SL005-FS02
019

■ MIRANDA - Deep recessed G1.5



SL015-W065
021



SL015-W044
021



SL015-N065
021



SL015-N044
021

■ MINI EYES



SL004-A01
024



SL004-A03
025



SL003-GU10-C05
027

■ GU10 



360° ROTATABLE SPOT LIGHT



Quick install
Screw free
Loop in loop out

CCT selectable
Select CCT by button
before installation

Male and female plug
Quick installation and can
easily change to other drivers

Insulation coverable

Lens and reflector optional



30°
360° **30° tiltable at all directions**

ROLAND I



Features

- 30° tiltable at all directions
- Insulation material coverable
- SMD solution with CCT selectable and Dim to warm functions
- IP65 for roomside

Water-proof

Front waterproof IP65



CCT Selectable

CCT3 switch changeable on driver



Triac Dim & Dim to Warm

Dimmable by dimmer



360° Rotation

30° tiltable at all directions



Iron Can



Be covered directly by insulation material



Application

Home, Shop, Specialty Stores, Showroom etc.

Finish optional

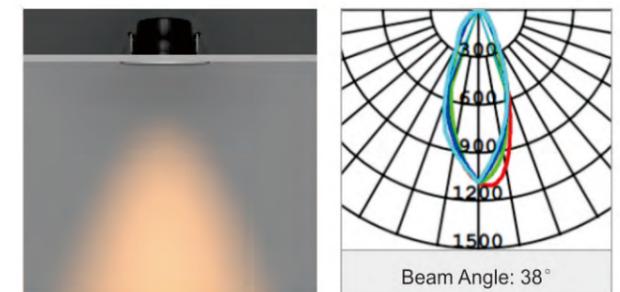

Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
SL360-A01DS	8.5W	720lm	3000K/4000K/6500K				
SL360-A01DC	8.5W	720lm	CCT3	38°	Black/White/Silver/Brushed Nickel	φ78mm	φ96x43mm
SL360-A01DW	6W	540lm	2200-2700				
SL360-B01DS	6W	500lm	3000K/4000K/6500K				
SL360-B01DC	6W	500lm	CCT3	38°	Black/White/Silver/Brushed Nickel	φ65mm	φ81x41mm

ROLAND II




IP65



Application

Home, Shop, Specialty Stores, Showroom etc.

Finish optional

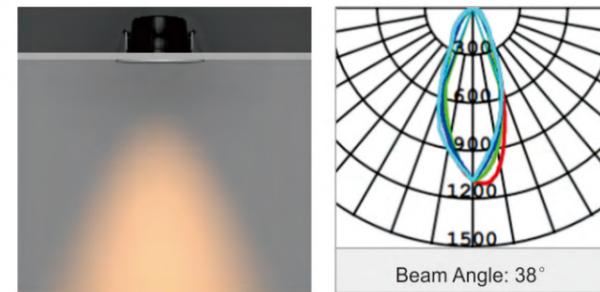

Features

- 30° tiltable at all directions
- Insulation material coverable
- COB solution with alu reflector provides uniform light
- IP65 for roomside

Water-proof

IP65 can be used into wet applications




360° Rotation

30° tiltable at all directions



Iron Can

Be covered directly by insulation material



Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
SL360-A02	8.5W	720lm	3000K/4000K/6500K	38°	Black/White/Silver/Brushed Nickel	φ78mm	φ96x43mm
SL360-B02	6W	500lm	3000K/4000K/6500K	38°	Black/White/Silver/Brushed Nickel	φ65mm	φ81x41mm



JAMES I



Application

Home, Office, Shop, Hotel etc.

Features

- 30° tiltable at all directions
- Insulation material coverable
- SMD solution with CCT selectable and Dim to warm functions

Water-proof

Front waterproof IP54



360° Rotation

30° tiltable at all directions



CCT3

CCT3 switch changeable on driver






Finish optional



Black



White



Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
SL361-A01	6W	500lm	3000K/4000K/6500K	38°	Black/White	φ68mm	φ81x32mm
SL361-A02	6W	500lm	CCT3	38°	Black/White	φ68mm	φ81x32mm

JAMES II



Application

Home, Office, Shop, Hotel etc.

Features

- 30° tiltable at all directions
- Insulation material coverable
- COB solution with alu reflector provides uniform light

Water-proof

Front waterproof IP54



360° Rotation

30° tiltable at all directions





Finish optional



Black



White



Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
SL361-B01	6W	500lm	3000K/4000K/6500K	38°	Black/White	φ68mm	φ81x32mm

COREIN

MODULE RECESSED SPOTLIGHT



COREIN



Adjustable / Lens



Features

- Module design, die-casting housing
- Isolated driver
- Beam angle 24°, 36° for choosing
- Fixed and adjustable available
- Lens and reflector versions optional
- 90-100lm/w, 5 years warranty

IP Class

IP65 for fixed version



Die-casting

Die-casting heat sink, heat fast



Insulation coverable for 7W





Model	Wattage	Lumen	CCT	Beam	Type	Cut hole	Dimensions
SL005-A	7W	700lm					
SL005-B	10.5W	1000lm	3000K/4000K/6500K	24°/36°	Fixed/Adjustable	φ68mm	φ85x62mm
SL005-C	12.5W	1300lm		36°			




Application

Home, Office, Shop, Hotel etc.

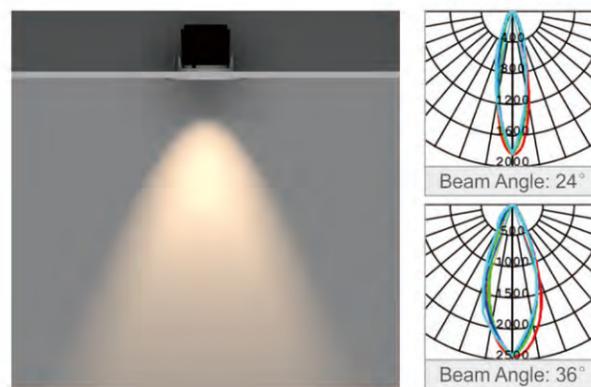


EXTENTION TRIM

SL005-FR01 Fixed




Finish: White
Material: Aluminum body
IP Rate: IP65
Size: φ85x20mm




SL005-FR02 Adjustable




Finish: White
Material: Aluminum body
IP Rate: IP20
Size: φ85x20mm



SL005-FR03 Fixed




Finish: White
Material: Aluminum body
IP Rate: IP65
Size: φ85x20mm




SL005-FR04 Adjustable




Finish: White
Material: Aluminum body
IP Rate: IP20
Size: φ85x44mm




SL005-FS01 Fixed




Finish: White
Material: Aluminum body
IP Rate: IP65
Size: 85x85x24mm



SL005-FS02 Adjustable



Finish: White
Material: Aluminum body
IP Rate: IP20
Size: 85x85x44mm



MIRANDA





SL015-W044
(Adjustable)



Application

Home, Office, Shop, Hotel etc.

Color of Reflector optional



Features

- Deep recessed and anti-glare
- Die-casting housing, good heat dissipation
- Dimming and IP65 / IP44 optional


Water-proof

Front waterproof IP44/IP65 available



Quick install

Screw free
Loop in loop out



Model	Wattage	Lumen	CCT	Beam	Type	IP Rate	Cut hole	Dimensions
SL015-W044	9W	700lm	3000K/4000K/6500K	38°	Adjustable	IP44	φ68mm	φ86x62mm
SL015-N044	9W	650lm	3000K/4000K/6500K	38°	Adjustable	IP44	φ68mm	φ86x62mm
SL015-W065	9W	700lm	3000K/4000K/6500K	38°	Fixed	IP65	φ68mm	φ86x62mm
SL015-N065	9W	650lm	3000K/4000K/6500K	38°	Fixed	IP65	φ68mm	φ86x62mm



MINI EYES



MINI EYES

Application

Wardrobe, Cupboard, Bookcase, Cabinet , Indoor space.

Finish optional



Black

White

Silver

Features

- Die-casting aluminum body, good heat dissipation
- Small size for narrow space

Small Size

The 25mm mini size is suitable for a more narrow space



Aluminum Body

Die-casting aluminum body, good heat dissipation



Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
SL004-A1	1W	70lm	3000K/6500K	36°	Silver/Black/White	φ28mm	φ38x25mm

MINI EYES



Features

- Die-casting aluminum body, good heat dissipation
- Small size for narrow space
- 12pcs with a junction box and one driver
- RF remote control dimming and group setting

Application

Bathroom Cabinet, Kitchen, Balcony, Canopy etc.

Accessories



Water-proof

Front waterproof IP65 available



Aluminum Body

Die-casting aluminum body, good heat dissipation




Remote Control

Dimming and group setting



Line Art

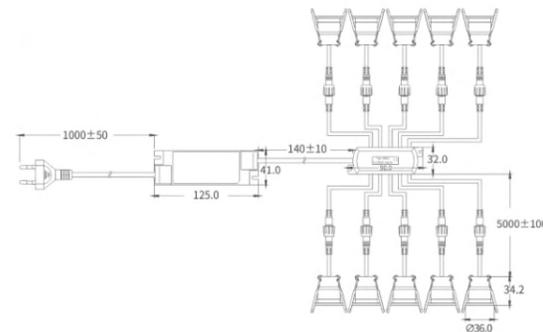

Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
SL004-A3	3W	210lm	3000K/6500K	38°	φ28mm	φ36x34mm



GU10 SPOT

50000hrs



White / CCT2



Application

Hotel, shops, showroom etc.

Features

- Suitable for sealed fixtures or fixtures under insulation material
- COB-like lens, providing uniform light
- One-piece heatsink, better heat dissipation capability
- Compatible with leading edge and trailing edge dimmers
- CCT selectable
- White, grey color optional
- Ra90, up to 100lm/W
- 50000hrs lifespan, 5years' warranty



Finished optional



White

Grey

Used inside sealed fixtures or fixtures under insulation material



Model	Wattage	Lumen	CCT	Beam	IP Rate	Dimensions
SL003-GU10B01	5W	460lm/470lm/500lm	2700K/3000K/4000K	38°	IP20/IP44	φ50x54mm



COMMERCIAL

LED Downlight

PIZZA	Multi-fit downlight	033 - 036
CAKE	Metal slim downlight	037 - 038
EIFFEL	Module downlight	039 - 045
DE GAULLIST	Deep recessed downlight UGR19	046 - 046
MAGIC HAT	Deep recessed downlight UGR22	047 - 048
CLOVER	Fire-rated downlight	049 - 054

Commercial Downlight

■ PIZZA - Multi-fit 







DL003-D06 034 DL003-D08 034 DL003-D12 034 DL003-P08 035 PDL003-E08 036

■ CAKE - Metal slim






DL007-D30 037 DL007-D40 037 DL007-D60 037 DL007-D80 037

■ EIFFEL - Module 







DL10-A30 041 DL10-B30 042 DL10-C30 043 DL10-D30 044 DL10-G60 045

■ DE GAULLIST - Deep Recessed Downlight ■ MAGIC HAT







DL005-DA40K 046 DL005-DA60K 046 DL005-DA80K 046 DV60B 047 DV80B 047

■ CLOVER - Fire-rated







SL002-C01 050 SL002-B01 051 SL002-A03 052 SL360-A03F 053 SL361-A03F 054



MULTI-FIT FLAT DOWNLIGHT



Quick install
Screw free
Loop in loop out



Adjust lever
Adjustable buckle cut size
Φ 50-260mm

22mm

CCT3
CCT3 changeable
optional

Multi-power

Bezels optional:
Detachable trim bezels of
4 colors.



PIZZA



Application

Corridor, Aisle, Circulation area

Color of Bezels optional



Features

- Adjustable buckle cut size Φ 50-260mm
- CCT3 switch on the back
- Dimming, non-dimming, multi-power optional
- Black, silver, chrome and brushed nickel bezel optional
- Slim body height 22mm

Cut Out

For φ50mm-φ260mm cut hole



Ultra-slim

The ultra-slim design satisfies a narrow space with more elegance



CCT3 & Multi-power

CCT3 & Multi-power changeable switch on back



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL003-606D	6W	600lm	3000K-4000K-6500K	110°	φ50-125mm	φ165x22mm
DL003-612D	12W	1100lm			φ50-125mm	φ165x22mm
DL003-818D	18W	1700lm			φ65-185mm	φ217x22mm
DL003-1121D	18W	1800lm			φ65-260mm	φ290x22mm
DL003-1123D	23W	2300lm			φ65-260mm	φ290x22mm

PIZZA SENSOR





Application

Corridor, Aisle, Circulation area

Features

- Adjustable buckle cut size Φ 65-185mm
- PIR infrared sensor, you can set the off time 5s/30s/60s/180s after leaving

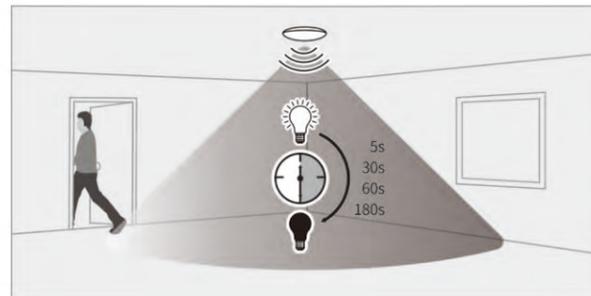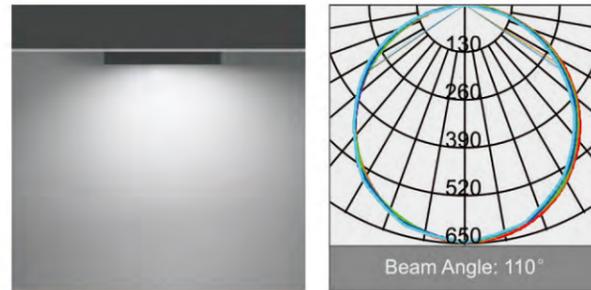

Cut Out

For ϕ 60mm- ϕ 185mm cut hole



Ultra-slim

The ultra-slim design satisfies a narrow space with more elegance



PIR infrared Sensor

Can set light off time 5s/30s/60s/180s after leaving



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL003-M01	9W-18W	900lm-1800lm	CCT3	110°	ϕ 65-185mm	ϕ 227x22mm

PIZZA EMERGENCY




Application

Corridor, Aisle, Circulation area

Features

- Adjustable buckle cut size Φ 65-185mm
- Emergency response time: 3 hours
- Power failure can be automatically lit up
- Multi-fit power changeable switch on driver

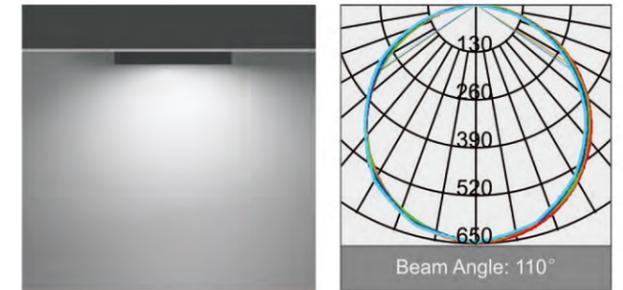

Cut Out

For ϕ 65mm- ϕ 185mm cut hole



Ultra-slim

The ultra-slim design satisfies a narrow space with more elegance



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL003-E01	18W	1800lm	4000K	110°	ϕ 65-185mm	ϕ 227x22mm

CAKE



Application

Home, Office, Shop, Hotel etc.

Features

- Metal slim body height 38mm
- External isolated driver
- Excellent dimming performance


IP44 Design

IP44 from front



Metal Housing

One piece stamped metal housing



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL007-A01D	7W	570lm	2700K/3000K/4000K	100°	φ90mm	φ112x37mm
DL007-A02D	12W	920lm			φ120mm	φ146x38mm
DL007-A03D	15W	1200lm			φ150mm	φ180x38mm
DL007-A04D	25W	2100lm			φ200mm	φ235x38mm



EIFFEL MODULE DOWNLIGHT



Deep recessed downlight
(Diffuser)



Deep recessed downlight
(Reflector)



Slight recessed downlight
(Diffuser)



Flat recessed downlight
(Diffuser)



Surface-mounted downlight
(Diffuser)

Combination of accessories

Module



Extention Recessed Trim



Surface-mounted Trim



EIFFEL



Application

Mall, Hall, Meeting Room, Hotel etc.

Features

- Module design
- CCT selectable
- High lighting efficiency 100lm/W
- IP54 for room side
- Tool free installation
- 50000hrs lifespan, 5 years warranty



Module design

The module can work with different trims




CCT3

CCT3 changeable switch on back



Quick install

Screw free
Loop in loop out



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL10-A30	6W	600lm	CCT3	100°	φ90mm	φ110x37mm
DL10-A40	9W	900lm			φ120mm	φ140x37mm
DL10-A60	15W	1600lm			φ150mm	φ160x37mm
DL10-A80	23W	2500lm			φ200mm	φ210x37mm

EIFFEL



Application

Mall, Hall, Meeting Room, Hotel etc.

Features

- Module design
- CCT selectable
- High lighting efficiency 100lm/W
- IP54 for room side
- Tool free installation
- 50000hrs lifespan, 5 years warranty



Module design

The module can work with different trims




CCT3

CCT3 changeable switch on back



Quick install

Screw free
Loop in loop out



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL10-B30	6W	600lm	CCT3	100°	φ90mm	φ120x52mm
DL10-B40	9W	900lm			φ120mm	φ150x52mm
DL10-B60	15W	1600lm			φ150mm	φ175x52mm
DL10-B80	23W	2500lm			φ200mm	φ230x52mm


EIFFEL



Application

Mall, Hall, Meeting Room, Hotel etc.

Color of reflector optional



Features

- Module design
- CCT selectable
- High lighting efficiency 100lm/W
- IP54 for room side
- Tool free installation
- 50000hrs lifespan, 5 years warranty



Module design

The module can work with different trims



CCT3

CCT3 changeable switch on back



Quick install

Screw free
Loop in loop out



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL10-C30	6W	540lm	CCT3	100°	φ90mm	φ120x70mm
DL10-C40	9W	800lm			φ120mm	φ150x70mm
DL10-C60	15W	1500lm			φ150mm	φ176x86mm
DL10-C80	23W	2300lm			φ200mm	φ230x80mm

EIFFEL



Application

Mall, Hall, Meeting Room, Hotel etc.

Features

- UGR 22
- Aluminum reflector
- CCT selectable, SDCM<6
- High lighting efficiency 120lm/W
- IP54 for room side
- Tool free installation
- 50000hrs lifespan, 5 years warranty


CCT3

CCT3 changeable switch on back



Quick install

Screw free
Loop in loop out



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL10-D60	15W	1850lm	CCT3	80°	φ150mm	φ176x86mm
DL10-D80	21W	2650lm			φ200mm	φ230x87mm

EIFFEL



Application

Mall, Hall, Meeting Room, Hotel etc.

Finished optional



Black



White

Features

- Module design
- CCT selectable
- High lighting efficiency 100lm/W
- Tool free installation
- 50000hrs lifespan, 5 years warranty



Module design

The module can work with different trims



CCT3

CCT3 changeable switch on back



Quick install

Screw free
Loop in loop out



Model	Wattage	Lumen	CCT	Beam	Efficacy	Finish	Dimensions
DL004-G60	15W	1600lm	CCT3	100°	110lm/W	Black/White	φ150x75mm
DL004-G80	23W	2500lm	CCT3	100°	110lm/W	Black/White	φ200x75mm

DE GAULLIST



Application

Office, Shopping Mall, Hotel, Airport etc.



Features

- Anti-glare. UGR<14 & UGR<19
- Integrated design, easy to install
- Multi-power and CCT3 optional
- 5 years warranty



Reflector Optional

Changeable reflector



CCT3

CCT3 changeable switch on back

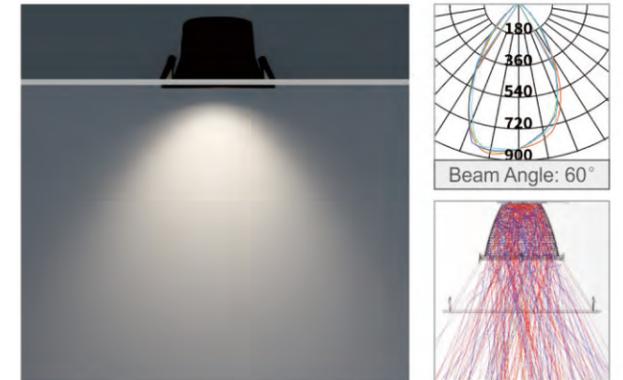


Model	Wattage	Lumen	CCT	UGR	Beam	Cut hole	Dimensions
DL005-B4S			2700K/4000K/6500K	19	60°		
DL005-B4C	9W	1100lm	CCT3	19	60°	φ125mm	φ145x92mm
DL005-B4S-14			2700K/4000K/6500K	14	38°		
DL005-W6S			2700K/4000K/6500K	19	60°		
DL005-W6C	13W	1600lm	CCT3	19	60°	φ150mm	φ175x110mm
DL005-W6S-14			2700K/4000K/6500K	14	38°		
DL005-B8S			2700K/4000K/6500K	19	60°		
DL005-B8C	20W	2400lm	CCT3	19	60°	φ200mm	φ220x140mm
DL005-B8S-14			2700K/4000K/6500K	14	38°		

MAGIC HAT



Application

Mall, Hall, Meeting Room, Hotel etc.



Features

- Anti-glare. UGR<22
- Integrated design, easy to install
- Good heat dissipation performance


Heat Sink

Good heat dissipation performance



Quick install

Screw free
Loop in loop out



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL060-6	12W	1000lm	2700K/4000K/6500K	100°	φ150mm	φ173x98mm
DL060-8	21W	2100lm			φ206mm	φ233x106mm



FIRE RATED DOWNLIGHT

Fire resistance test : BS476-20 / BS476-21



Quick install
Screw free
Loop in loop out



Insulation Cover
Can be covered by insulation directly



Male and female plug
Quick installation and can easy change to other drivers



90 min anti-fire test



Front CCT3 Switch
2700K-6500K



Anti-glare design
Deep anti-glare

Accessories

Detachable trim bezels of 4 colors.



Brushed Nickel

Chrome

Silver

Black



IP65



Application

Home, Office, Shop, Hotel etc.

Color of Bezels optional



Brushed Nickel

Chrome

Silver

Black

Features

- 90 min anti-fire test
- Up to 300mm height insulation coverable insulation material
- IP65 water-proof
- CCT3 changeable optional
- 3pin loop in and loop out
- Wifi function available
- Low profile design, good for narrow space



Fire-rated

Pass 90min anti-fire test





CCT3

Front switch to change the CCT



Quick install

Screw free
Loop in loop out

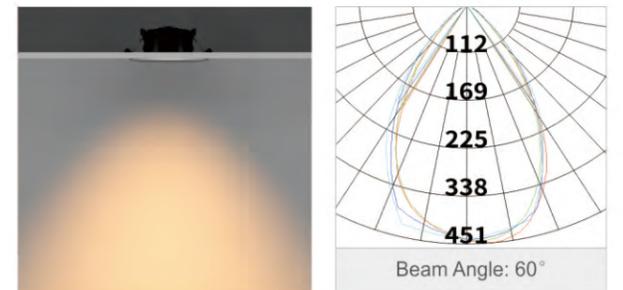

Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
SL002-C01S	6W	500lm	3000K/4000K/6500K	60°	φ68mm	φ88x40mm
SL002-C01C	6W	500lm	CCT3			

CLOVER IV



Application

Home, Office, Shop, Hotel etc.

Features

- 90 min anti-fire test
- Up to 300mm height insulation coverable insulation material
- IP65 water-proof
- CCT3 changeable optional
- 3pin loop in and loop out

Color of Bezels optional



Fire-rated

Pass 90min anti-fire test





Quick install

Screw free
Loop in loop out



CCT3

Front switch to change the CCT

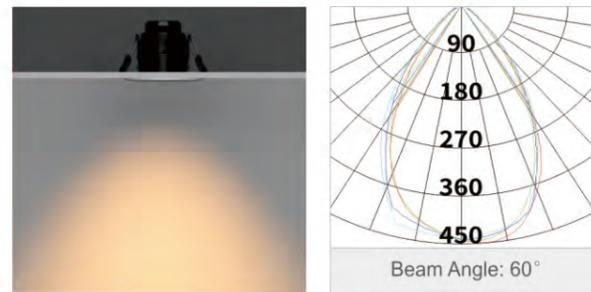

Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
SL002-B01S	6W	500lm	3000K/4000K/6500K	60°	φ68mm	φ88x64mm
SL002-B01C	6W	500lm	CCT3			

CLOVER III



Application

Home, Office, Shop, Hotel etc.

Features

- 90 min anti-fire test
- Up to 300mm height insulation coverable insulation material
- CCT3 changeable optional
- 3pin loop in and loop out
- Separated isolated driver with built in terminal
- Male & female plug between driver and lamp
- Wifi version optional

Color of Bezels optional



Fire-rated

Pass 90min anti-fire test





Quick install

Screw free
Loop in loop out



CCT3

Front switch to change the CCT

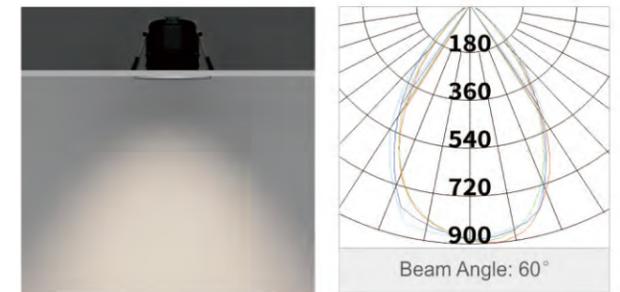

Model	Wattage	Lumen	CCT	LED Type	Beam	Cut hole	Dimensions
SL002-A03S	8.5W	600lm	3000K/4000K/6500K	COB	60°	φ70mm	φ88x65mm
SL002-A03C	8.5W	600lm	CCT3	SMD	60°	φ70mm	φ88x65mm

ROLAND III



Features

- 90 min anti-fire test
- CCT3 and dimming
- Tooling free installation
- Irradiation angle 360° horizontal adjustment, 30° tilt adjustment
- Separate isolated power supply connect lamp with connect terminal
- Can be used as fire rated down light with a iron can cover

Fire-rated

Pass 90min anti-fire test



360° Rotation

30° tiltable at all directions



CCT3

CCT3 switch changeable on driver



Iron Can


Be covered directly by insulation material



Application

Home, Office, Shop, Hotel etc.

Finish optional

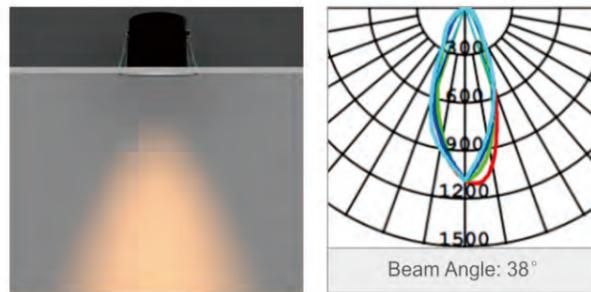

Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
SL360-A03FC	8.5W	720lm	CCT3	38°	Black/White/Silver	φ80mm	φ96x63mm
SL360-A03FS	8.5W	720lm	3000K/4000K/6500K	38°	Black/White/Silver	φ80mm	φ96x63mm
SL360-B03FC	6W	500lm	CCT3	38°	Black/White/Silver	φ68mm	φ81x63mm
SL360-B03FS	6W	500lm	3000K/4000K/6500K	38°	Black/White/Silver	φ68mm	φ81x63mm

ROLAND V



Features

- 90 min anti-fire test
- CCT3 and dimming
- Tooling free installation
- Irradiation angle 360° horizontal adjustment, 30° tilt adjustment
- Separate isolated power supply connect lamp with connect terminal
- Can be used as fire rated down light with a iron can cover

Fire-rated

Pass 90min anti-fire test



360° Rotation

30° tiltable at all directions




CCT3

CCT3 switch changeable on driver



Iron Can


Be covered directly by insulation material

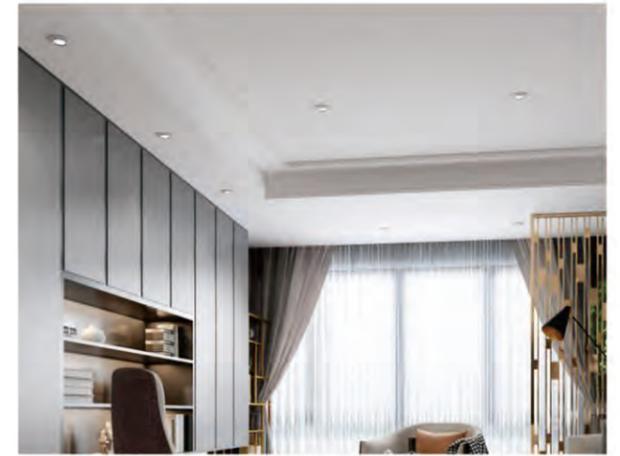

Application

Home, Office, Shop, Hotel etc.

Finish optional

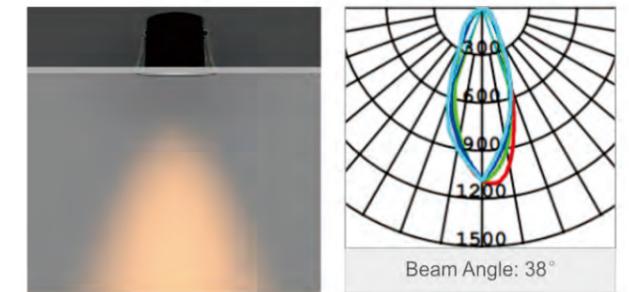


Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
SL361-A03FC	6W	500lm	CCT3	38°	Black/White/Silver	φ68mm	φ81x63mm
SL361-A03FS	6W	500lm	3000K/4000K/6500K	38°	Black/White/Silver	φ68mm	φ81x63mm

RESIDENTIAL

LED Spotlight

AMBER	DIY slim recessed spot light	060 - 060
ROSEY	Metal slim recessed spot light	061 - 062
SOFIA	DIY G3 recessed spot light	063 - 063
AVALOR	DIY G4 recessed spot light	064 - 065
CLIO	DIY high power recessed spot light	066 - 066
PEGGY / EMILY / BOX	Surface mounted spot light	067 - 072
MODULE	Module & fixture	073 - 074
GECO	GU10	075 - 076

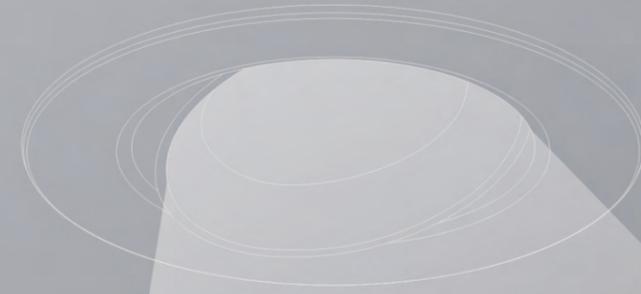

Residential Spotlight

■ AMBER - DIY slim



SL001-C01
060



SL001-C02
060



SL001-C03
060

■ ROSEY - Metal slim



SL001-D01
061



SL001-D02
061

■ SOFIA - DIY G3



SL001-A01
063



SL001-A02
063



SL001-A03
063

■ CLIO - DIY high power New



SL001-B01
064



SL001-B02
066



SL001-B03S
066

■ AVALOR - DIY G4 New



SL001-E01
064



SL001-E02
064



SL001-E03
064



SL001-E04
065



SL001-E05
065

■ PEGGY / EMILY / BOX - Surface mounted



SP001-A01B
068



SP001-A02B
068



SP001-A03B
068



SP001-A04B
068



SP001-D01B
069



SP001-D03B
069



SP001-E01W
072



SP001-E02W
072



SP001-E04W
072

■ Module & Fixture New



SL003-A01
074



SL003-B01
074



SL003-C01
074

■ GECCO - GU10 New



SL003-GU10B01
075



SL003-GU10B02
075



SL003-GU10B03
075




DIY

RECESSED SPOT LIGHT



Tool-free
Loop in and loop out

Bezels optional:
Different bezels changeable easily.

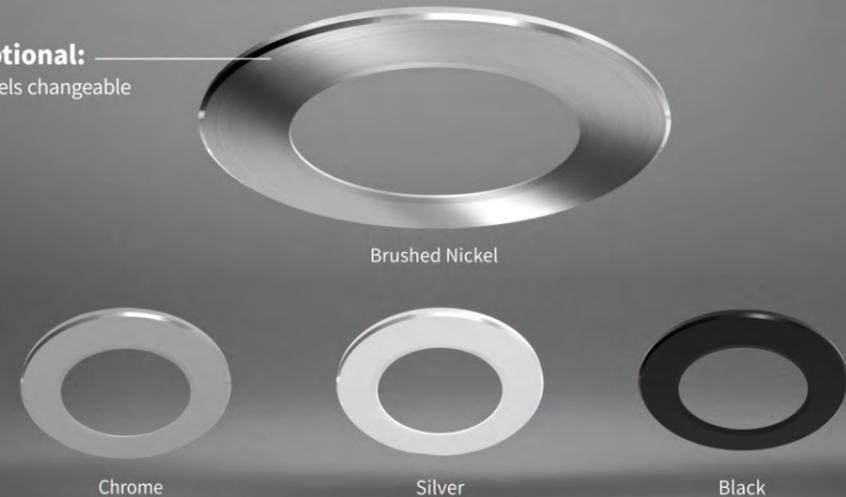


AMBER



Application

Home, Office, Shop, Hotel etc.


Color of Bezels optional

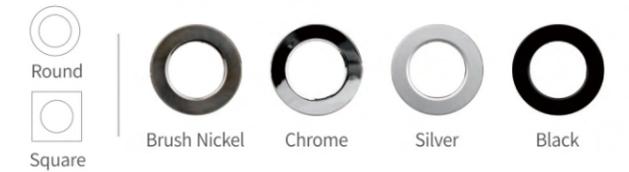

Accessories



Line Art

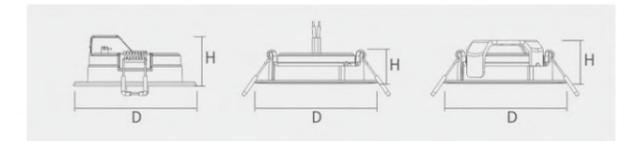

SL001-C02



SL001-C01

IP65



SL001-C03

360°

Features

- different colors of bezels optional
- IP20/IP44/IP65 optional
- Tooling free design save the installation cost
- Ultra-thin design suitable for narrow space

Water-proof

Front waterproof IP44/IP65



360° Rotation

30° tiltable at all directions



Ultra-slim

Ultra-slim design for narrow space



Model	Wattage	Lumen	CCT	Beam	IP Rate	Cut hole	Dimensions
SL001-C01	4.8W	400lm	2700K/3000K/4000K	100°	IP65	φ68mm	φ87x35mm
SL001-C02	4.8W	400lm	2700K/3000K/4000K	38°	IP44/IP20	φ68mm	φ87x24mm
SL001-C03	4.8W	400lm	2700K/3000K/4000K	38°	IP44/IP20	φ68mm	φ87x30mm

ROSEY



SL001-D02

IP65



SL001-D01

IP65



Application

Home, Office, Shop, Hotel etc.

Color of Bezels optional



Black / Lens



Black / Reflector

Junction box optional



Features

- IP65 for roomside
- Die-casting trim Slim design for narrow space
- Aluminum reflector and PC lens optional
- CCT selectable
- Built-in driver
- Extra junction box optional

Water-proof

Front waterproof IP65



CCT3

CCT3 changeable switch on back



Slim body

Slim body for narrow space installation



Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
SL001-D01	6.5W	600lm	CCT3	38°	Black/White	φ75mm	φ85x30mm
SL001-D02	6.5W	600lm	CCT3	38°	Black/White	φ75mm	φ85x30mm



SOFIA



Application

Home, Office, Shop, Hotel etc.

Color of Bezels optional



Features

- Different colors bezels optional
- IP20/IP44/IP65 optional
- Screw free design save the installation cost
- Excellent dimming performance compatible with leading edge and trialing edge dimmers
- Can be installed directly into the insulation with the extra frame

Water-proof

Front waterproof IP44/IP65 available



CCT3

CCT3 changeable switch on back



Quick install


Screw free
Loop in loop out



Accessories



Can be installed directly into the insulation



Model	Wattage	Lumen	CCT	Beam	IP Rate	Cut hole	Dimensions
SL001-A01D	7W	500lm	3000K/4000K/6500K	100°	IP65	φ68mm	φ87x47mm
SL001-A01C	7W	500lm	CCT3				
SL001-A03D	5W	400lm	3000K/4000K/6500K	38°	IP44	φ68mm	φ87x47mm
SL001-A03C	5W	400lm	CCT3				
SL001-A02D	5W	400lm	3000K/4000K/6500K	100°	IP20	φ68mm	φ87x47mm

AVALOR



Application

Home, Office, Shop, Hotel etc.

Color of Bezels optional



Features

- Different colors bezels optional
- IP44/IP65 optional
- Screw free design save the installation cost
- Excellent dimming performance compatible with leading edge and trialing edge dimmers
- Can be installed directly into the insulation with the extra frame

Water-proof

Front waterproof IP44/IP65 available



CCT3

CCT3 changeable switch on back and on wall




Quick install

Screw free
Loop in loop out



Accessories



Model	Wattage	Lumen	CCT	Beam	IP Rate	Cut hole	Dimensions
SL001-E02D/E03D	5.5W	450lm	3000K/4000K/6500K	38°/60°	IP44/IP65	φ68mm	φ87x47mm
SL001-E02C/E03C	5.5W	450lm	CCT3				
SL001-E01D	7W	560lm	3000K/4000K/6500K	100°	IP65	φ68mm	φ87x47mm
SL001-E01C	7W	560lm	CCT3				

AVALOR



Application

Home, Office, Shop, Hotel etc.

Color of Bezels optional



Accessories



Water-proof

Front waterproof IP44/IP65 available



CCT3

CCT3 changeable switch on back




Quick install

Screw free
Loop in loop out



Model	Wattage	Lumen	CCT	Beam	IP Rate	Cut hole	Dimensions
SL001-E04D	5.5W	510lm	3000K/4000K/6500K	38°	IP65	φ68mm	φ87x47mm
SL001-E05D	5.5W	510lm	3000K/4000K/6500K	38°	IP44	φ68mm	φ87x47mm

CLIO

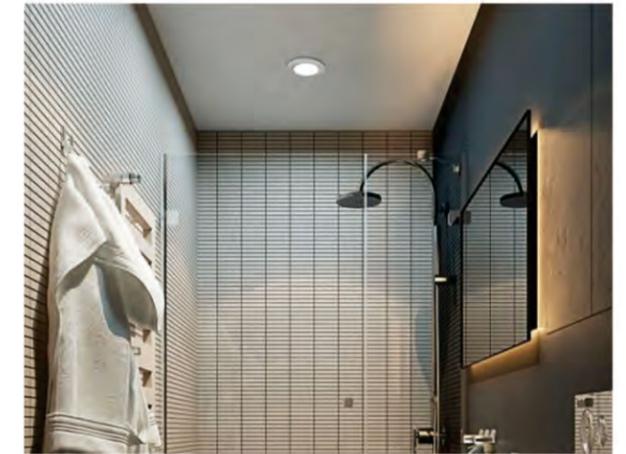

Application

Home, Office, Shop, Hotel etc.

Color of Bezels optional



Accessories



Features

- Different colors bezels can be changed easily
- IP44 and IP65 can be used into wet applications
- Tooling free design save the installation cost
- Excellent dimming performance compatible with leading edge and trialing edge dimmers
- Can be installed directly into the insulation with the extra frame

Water-proof

IP44 and IP65 can be used into wet applications



CCT3

CCT3 changeable switch on back



Quick install


Screw free
Loop in loop out



Model	Wattage	Lumen	CCT	Beam	IP Rate	Cut hole	Dimensions
SL001-B01D	10W	1000lm	3000K/4000K/6500K	100°	IP65		
SL001-B01C	10W	1000lm	CCT3	100°	IP65		
SL001-B02D	9W	750lm	3000K/4000K/6500K	38°	IP44	φ85mm	φ105x59mm
SL001-B02C	9W	750lm	CCT3	38°	IP44	φ85mm	φ105x59mm
SL001-B03S	8W	640lm	3000K/4000K/6500K	100°	IP54		

DECO SPOT LIGHT

Modular design

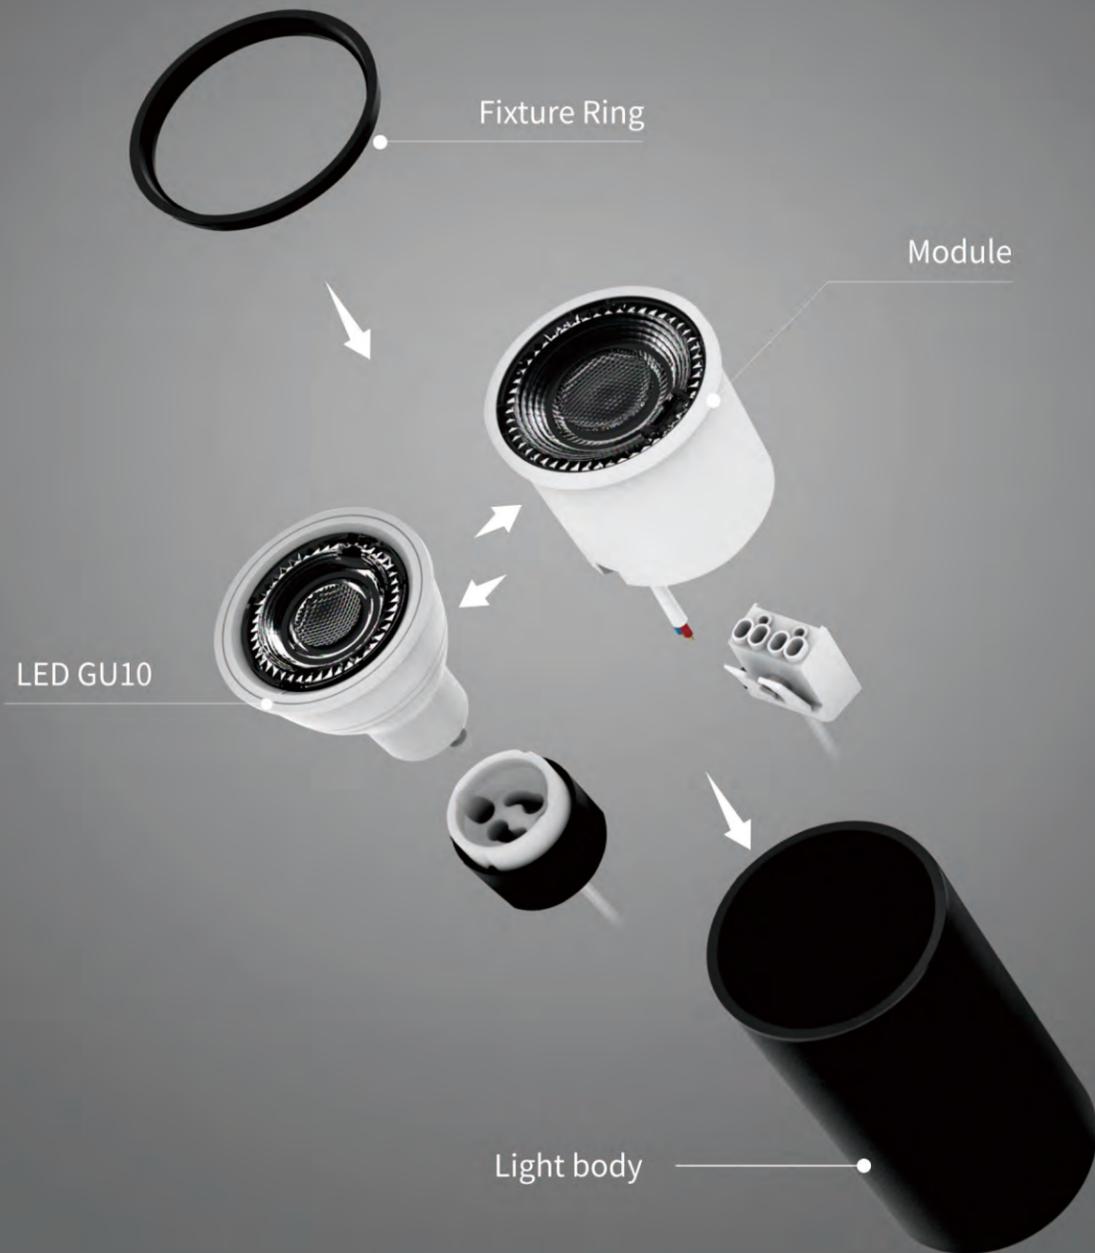

PEGGY



SP001-A03B




SP001-A01B



SP001-A02B




SP001-A04B

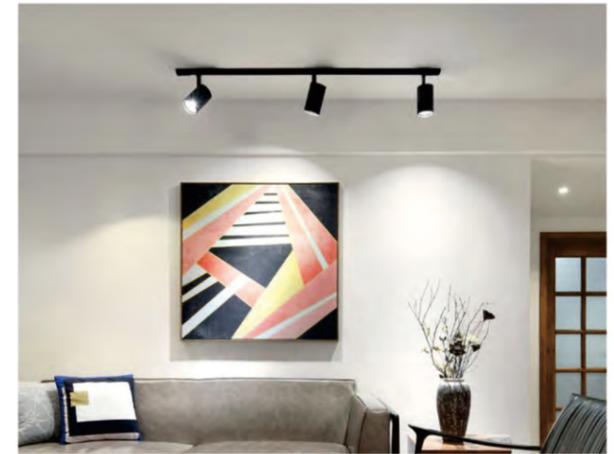

Application

Home, Office, Shop, Hotel etc.

Line Art

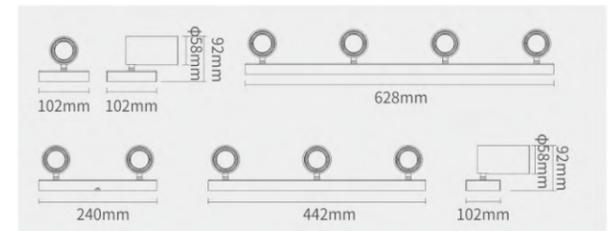

Features

- Surface mount design
- Easy to change the light source
- Dimmable and CCT optional
- White and black body optional
- 350° rotatable

350° Rotatable

Vertically tilt 90°, horizontally rotate 350°



Light Source Optional

Can be used with GU10 or module



Model	Wattage	Lumen	CCT	Beam	LED	Dimensions
SP001-A01B	1x5W	450lm	3000K/4000K	38°	GU10/ Module	φ58x102x92mm
SP001-A02B	2x5W	900lm				φ58x240x92mm
SP001-A03B	3x5W	1350lm				φ58x442x92mm
SP001-A04B	4x5W	1800lm				φ58x628x92mm

EMILY



SP001-D03B




SP001-D01B



Application

Home, Office, Shop, Hotel etc.

Line Art

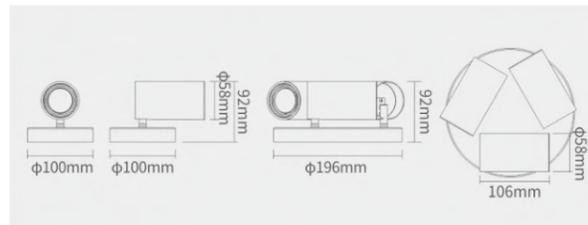

Features

- Surface mount design
- Easy to change the light source
- Dimmable and CCT optional
- White and black body optional
- 350° rotatable

350° Rotatable

Vertically tilt 90°, horizontally rotate 350°



Light Source Optional

Can be used with GU10 or module



Model	Wattage	Lumen	CCT	Beam	LED	Dimensions
SP003-D01B	1x5W	400lm	3000K/4000K/6500K	38°	GU10/ Module	φ58xφ100x92mm
SP003-D03B	3x5W	1200lm				φ58xφ196x92mm



DECO SPOT LIGHT - BOX



GU10



BOX



SP001-E01W



SP001-E02W



SP001-E04W



SP001-E01B



SP001-E02B




SP001-E04B



Application

Home, Office, Shop, Hotel etc.

Line Art

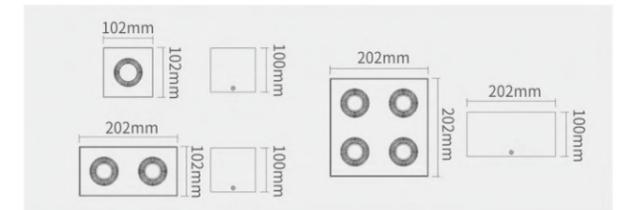

Features

- Surface mount design
- Easy to change the light source
- Dimmable and CCT optional
- White and black body optional
- Adjustable tilt 30° & rotation 350°



Model	Wattage	Lumen	CCT	Beam	Finish	Dimensions
SP001-E01W	1x5W	450lm				102x102x100mm
SP001-E02W	2x5W	900lm	3000K/4000K	38°	White / Black	202x102x100mm
SP001-E04W	4x5W	1800lm				202x202x100mm

MODULE

Module & Accessories Combination



MODULE & EXTENTION TRIM

SL003-A01

SL003-A02

220-240V ~50/60Hz, 80 Ra CRI, L70B50 25,000H, Triac Dim, Non Dim, RoHS, CE

Model	Wattage	Lumen	CCT	Beam	Dimensions
SL003-A01S	6W	500lm	3000K/4000K	100°	φ50x43mm
SL003-A02S	6W	480lm	3000K/4000K	45°	φ50x43mm
SL003-A02C	6W	480lm	CCT2		

<p>Steel Fixed Trim</p> <p>Finish: White / Brushed Nickel Material: Steel body IP Rate: IP20 Size: φ80x27mm</p> <p>φ68mm</p>		<p>Steel Adjustable Trim</p> <p>Finish: White / Brushed Nickel Material: Steel body IP Rate: IP20 Size: φ84x25mm</p> <p>φ68mm</p>	
<p>Plastic Fixed Trim</p> <p>Finish: White / Black Material: Plastic body IP Rate: IP20 Size: φ87x25mm</p> <p>φ68mm</p>		<p>Plastic Adjustable Trim</p> <p>Finish: White / Black Material: Plastic body IP Rate: IP20 Size: φ87x25mm</p> <p>φ68mm</p>	
<p>Aluminum Fixed Trim</p> <p>Finish: White / Black Material: Aluminum body IP Rate: IP44 Size: φ81x30mm</p> <p>φ68mm</p>		<p>Aluminum Adjustable Trim</p> <p>Finish: White / Black Material: Aluminum body IP Rate: IP20 Size: φ82x25mm</p> <p>φ68mm</p>	

GECO



SL003-GU10B01



SL003-GU10B02



SL003-GU10B03



Application

Restaurant, coffee shop, bar, home, office, shops, hotel etc.


This product works well with the below popular fixtures in Euro market.



The affordable LED spot solution

Features

- Cob-like lens , more elegant looking
- Compatible with **Leading edge** and **trailing edge** dimmers
- Comply with ERP 2019/2020 and **new EMC** standard in 2022
- Dim and non dim optional
- Up to **100lm/W**@4000K version
- 2 years warranty



Model	Wattage	Lumen	CCT	Beam	Dimensions
SL003-GU10B01	4.8W	420lm/430lm/450lm	2700K/3000K/4000K	38°	φ49x55mm
SL003-GU10B02	4.8W	400lm/410lm/430lm	2700K/3000K/4000K	100°	
SL003-GU10B03	4.8W	420lm	CCT2	38°	



RESIDENTIAL

LED Downlight

FLYING	Backlit downlight	081 - 081
CREPE	Sidelit downlight	082 - 082
BAGEL	Cabinet light	083 - 084

Residential Downlight

■ FLYING - Backlit



DL002-A25 081 DL002-A30 081 DL002-A35 081 DL002-A40 081 DL002-A60 081 DL002-A80 081

■ CREPE - Sidelit



DL001-075R 082 DL001-100R 082 DL001-125R 082 DL001-150R 082 DL001-220R 082



DL001-075S 082 DL001-110S 082 DL001-125S 082 DL001-150S 082 DL001-220S 082

■ BAGEL - Cabinet light



DL008-A01 083 DL008-B01 083



FLYING




Application

Corridor, Aisle, Circulation area

Features

- The smooth housing ensures uniform heat dissipation, easy to install and easy to carry.
- A variety of sizes are available.
- Integral spring fixture retention clamps are strong and flexible and can bend up to 150 degrees making it much easier to install and mount on the ceiling.
- Solid-state construction for high shock and vibration resistance. Suitable for home ceiling and Type CE Rated – this light is perfect fit for installation in slopes and locations with less ceiling clearance.



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL002-A25	3.5W	250lm	3000K/4000K/6500K	110°	φ75mm	φ94x46mm
DL002-A30	5W	360lm			φ80mm	φ98x46mm
DL002-A35	6.7W	510lm			φ95mm	φ108x48mm
DL002-A40	9W	680lm			φ105mm	φ125x48mm
DL002-A60	15W	1300lm			φ150mm	φ167x48mm
DL002-A80	20W	1800lm			φ200mm	φ215x48mm

CREPE



Application

Home, Office, Shop, Hotel etc.

Features

- Integrated slim design
- No flicker, comfortable and natural light
- Intelligent driver with short-circuit protection, improve safety performance
- High-quality springs with plastic protective sleeves, ensure installation convenient and safe

Built-in driver

Easy installation




Ultra-slim

Ultra-slim design for narrow space



Line Art

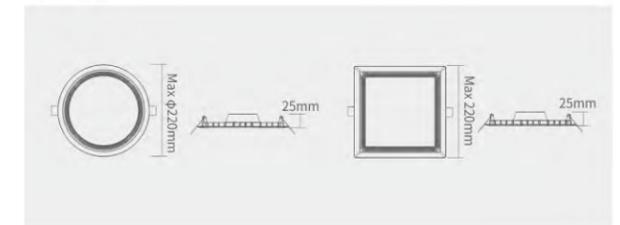

Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
DL001-075R	3W	200lm	3000K/4000K/6500K	110°	φ75mm	φ93x25mm
DL001-100R	6W	350lm			φ100mm	φ118x25mm
DL001-125R	9W	700lm			φ125mm	φ143x25mm
DL001-150R	12W	900lm			φ150mm	φ168x25mm
DL001-220R	18W	1600lm			φ200mm	φ220x47mm
DL001-075S	3W	200lm			3000K/4000K/6500K	110°
DL001-100S	6W	350lm	100x100mm	118x47mm		
DL001-125S	9W	700lm	125x125mm	143x47mm		
DL001-150S	12W	900lm	150x150mm	168x47mm		
DL001-220S	18W	1600lm	200x200mm	220x47mm		

BAGEL



Application

Wardrobe, Cupboard, Bookcase, Cabinet.

Accessories



Features

- Slim body, 24mm height
- Constant current output
- 6pcs with a junction box and one driver
- White and brushed nickel color optional
- Easy wiring and installing

Ultra-slim

Ultra-slim design for narrow space



2 Installations

2 installation: Recessed and surface-mounted




External Drive

6pcs with a junction box and one driver



Line Art

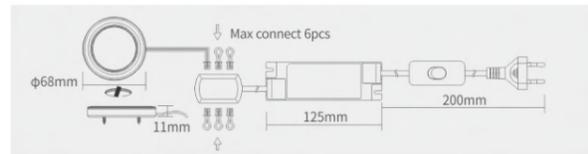


Model	Wattage	Lumen	CCT	Beam	Finish	Installation	Cut hole	Dimensions
DL008-A	2.5W	190lm	3000K	100°	White/Brushed Nickel	Recessed	φ63mm	φ68x11mm
DL008-B	2.5W	190lm	3000K	100°	White/Brushed Nickel	Surface-mounted	/	φ68x11mm



LED CEILING AND WALL LIGHT

■ Adeline ^{New}



CL001-300
088

■ Muffin ^{New}



CL003-A01
089

CL004-A
091

CL004-B
091

CL004-C
091

■ CD Mirror ^{New}



CL002-A11
093

CL002-B15
093

CL002-C24
093

CL005-D12
094



ADELINE



Wood



White+Wood



White



Black

Features

- Plastic frame with wood, white and black finishing. Unique colors clashing design is available
- PMMA diffuser, light transmittance is up to 80%
- Switch CCT 2700K - 4000K - 6500K
- 25000 hours lifespan, high lighting efficiency 90lm/w
- CE, RoHs and new ERP 2019/2015 compliant
- WiFi function is optional
- Night light mode for RF version




Application

Bedroom, Livingroom, Corridor, Aisle, Circulation area

CCT selectable by dip switch and wall switch



Dimming by dimmer or RF control



Model	Wattage	Lumen	CCT	Efficacy	Beam	Dimensions
CL001-300	21W	1900lm	2700K/4000K/6500K	90lm/W	100°	φ300x50mm
CL001-450	28W	2800lm	2700K/4000K/6500K	100lm/W	100°	φ450x60mm

MUFFIN



IP54




Application

Corridor, Aisle, Circulation area

Features

- Ceiling and wall luminaires for indoor use
- High ingress protection rating: IP54
- Multi CCT: a button on the lamp to choose the CCT you need
- Multi power: a button on the lamp to choose the power you need
- Sensor, DALI, emergency function optional
- Comply with new ERP and EMC
- Can work with BESA box (51mm & 78mm)
- Up to 100lm/W
- 5years warranty



Model	Wattage	Lumen	CCT	Beam	IP Rate	Dimensions
CL003-A01	20W-25W	2200lm-2600lm	CCT2(3000K-4000K)	100°	IP54	φ300x52mm
CL003-A02	10W-15W	1100lm-1600lm	CCT2(3000K-4000K)	100°	IP54	φ200x52mm



MUFFIN



CL004-A

IP65



CL004-B



CL004-C



Application


Outdoor walls, pools and other wet scenes

Can be connected to solar panels



Features

- Ceiling and wall luminaires for outdoor use
- High ingress protection rating: IP65
- Multi CCT: a button on the lamp to choose the CCT you need
- Multi power: a button on the lamp to choose the power you need
- Sensor, DALI, emergency function optional
- Comply with new ERP and EMC
- Up to 100lm/W
- 5years warranty



Model	Wattage	Lumen	CCT	Beam	IP Rate	Dimensions
CL004-A01	20W-25W	2200lm-2600lm	CCT2(3000K-4000K)	100°	IP65	φ300x55mm
CL004-A02	10W-15W	1100lm-1600lm	CCT2(3000K-4000K)	100°	IP65	φ200x55mm
CL004-B01	20W-25W	2200lm-2600lm	CCT2(3000K-4000K)	100°	IP65	φ300x55mm
CL004-B02	10W-15W	1100lm-1600lm	CCT2(3000K-4000K)	100°	IP65	φ200x55mm
CL004-C01	20W-25W	2200lm-2600lm	CCT2(3000K-4000K)	100°	IP65	φ300x55mm
CL004-C02	10W-15W	1100lm-1600lm	CCT2(3000K-4000K)	100°	IP65	φ200x55mm



CD MIRROR



Surface-mounted



Pendant (with long pole)



Pendant (with metal wire)




Application

Home, Office, Hotel, Gym reception room, Classroom, Restaurant

Features

- Narrow trim design
- White and black are available
- 2 installation : Surface-mounted and pendant
- 5 years warranty



Model	Wattage	Lumen	CCT	Efficacy	Beam	Dimensions
CL002-A11	15W	1500lm	3000K/4000K/5000K	100lm/W	120°	φ300x80mm
CL002-A15	25W	2500lm				φ480x80mm
CL002-A24	50W	5000lm				φ600x80mm

CD MIRROR



White



Black



Application

Home, Office, Shop, Hotel etc.

Features

- Narrow trim design
- White and black are available
- 2 installation : Surface-mounted and pendant
- UGR 19
- 5 years warranty



Ultra-slim

Ultra-slim design for narrow space



2 installations

Surface-mounted and pendant



Model	Wattage	Lumen	CCT	Beam	Finish	Dimensions
CL002-D12	15W	1500lm	3000K/4000K/5000K	120°	Black/White	φ300x551mm
CL002-D16	25W	2500lm				φ480x551mm
CL002-D24	40W	4000lm				φ600x551mm

SMART LIGHTING



Product Index

Smart Ambient Light



WL001
100

Smart Light Source



WL001-GU10101
103



WL001-GU10201
104



WL001-A60201
105



WL001-BR3001
106

Smart Down Light



WL001-NAD401
108



WL001-G3A101
109



WL001-G3A301
109



WL001-D1701
110

Smart Ceiling Light



WCL002-300
111



WPL001-606D
112



CL003-W11
113



CL004-W12
114

Smart Fire Rated Down Light



WL001-FG3A03
115



WL001-D36A03
116



Smart Home System



LED Smart Products




Technical comparison

	Bluetooth	Zigbee	WiFi	Sig mesh
Communication	Independent	Mesh	Network	Mesh
Long range control	/	Need Gateway	/	Need Gateway
Devices connect number	8	<10-100	<10-100	Over 150
Coverage area	<10m	10-75m	10-50m	Theoretically no limit with 2 Devices in 100m
PowerConsumer	Low	Medium	High	Low
Setup	Simple	Complex	Simple	Simple
Cost	Cheap	Expensive	Expensive	Cheap
Network size	Small	Medium	Medium	Big
Response speed	Fast	Slow	Slow	Fast
Security level	High	High	Low	High
Network Stability	Stable	Stable	Unstable	Stable

Features

- Voice & APP control, No gateway required with WIFI devices
- Dim, CCT, RGBCW function optional
- 16,000,000 colors in RGB mode
- Work with Google Assistant, Amazon Alexa
- Work with Sensor, Remote control simplifies operation in Bluetooth devices

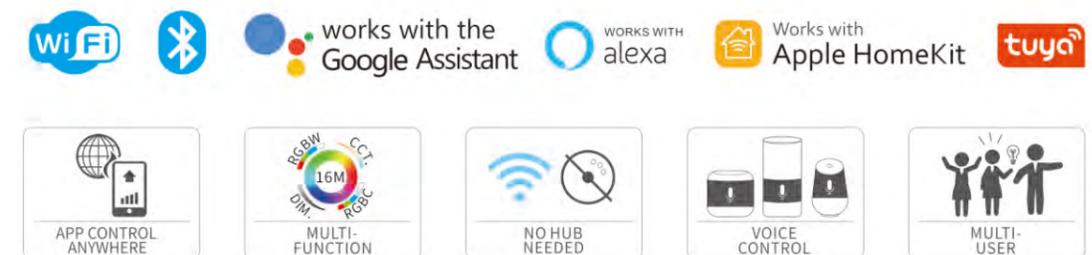

SMART AMBIENT LIGHT




Application

Home, Bar, Hotels, Party etc.

Features

- Smart Life APP control, no gateway required
- Dim, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music
- Tool-free installation
- AC120V / AC230V



Model	Wattage	Lumen	CCT
Wal001	24W	1200lm	2700K~6500K+RGBCW





Tool-free installation

SMART GU101




Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.

Features

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music
- AC230V



Model	Wattage	Lumen	CCT	Beam	Dimensions
WL001-GU10102	4.8W	350lm	2700K~6500K	100°	φ50x60mm
WL001-GU10105			2700K~6500K+RGB		
BL001-GU10102	4.8W	350lm	2700K~6500K	100°	φ50x60mm
BL001-GU10105			2700K~6500K+RGB		

SMART GU102




Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.

Features

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music
- AC230V



Model	Wattage	Lumen	CCT	Beam	Dimensions
WL001-GU10202	4.8W	350lm	2700K~6500K	38°	φ50x54mm
WL001-GU10205			2700K~6500K+RGB		
BL001-GU10202	4.8W	350lm	2700K~6500K	38°	φ50x54mm
BL001-GU10205			2700K~6500K+RGB		

SMART BULB



BASE: E27



BASE: B22



BASE: E26



Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.

Features

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music
- AC100V / AC230V optional



Model	Wattage	Lumen	CCT	Beam	Base type	Dimensions
WL001-A60202	9W	806lm	2700K~6500K	180°	E26/E27/B22	φ60x119mm
WL001-A60205			2200K~6500K+RGB			
BL001-A60202	9W	806lm	2700K~6500K	180°	E26/E27/B22	φ60x119mm
BL001-A60205			2700K~6500K+RGB			

SMART BR30




Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.

Features

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music



Model	Wattage	Lumen	CCT	Beam	Base type	Dimensions
WL001-BR3002	12W	1200lm	2700K~6500K	120°	E26	φ95x128mm
WL001-BR3005			2700K~6500K+RGB			
BL001-BR3002	12W	1200lm	2700K~6500K	120°	E26	φ95x128mm
BL001-BR3005			2700K~6500K+RGB			

SMART DOWN LIGHT-NA




Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.

Features

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
WL001-NAD402	10W	800-850lm	2700K~6500K	60°	φ100mm	φ140x56mm
WL001-NAD405			2700K~6500K+RGB			
BL001-NAD402	10W	800-850lm	2700K~6500K	60°	φ100mm	φ140x56mm
BL001-NAD405			2700K~6500K+RGB			
WL001-NAD602	15W	1200-1275lm	2700K~6500K	60°	φ150mm	φ186x56mm
WL001-NAD605			2700K~6500K+RGB			
BL001-NAD602	15W	1200-1275lm	2700K~6500K	60°	φ150mm	φ186x56mm
BL001-NAD605			2700K~6500K+RGB			

SMART DOWN LIGHT-G3A1



WL001-G3A1



WL001-G3A3




Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.


Features

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
WL001-G3A102	4.8W	320lm	2700K~6500K	100°	φ70mm	φ86x47mm
WL001-G3A105			2700K~6500K+RGB			
BL001-G3A102	4.8W	320lm	2700K~6500K	100°	φ70mm	φ86x47mm
BL001-G3A105			2700K~6500K+RGB			
WL001-G3A302	4.8W	320lm	2700K~6500K	38°	φ70mm	φ86x47mm
WL001-G3A305			2700K~6500K+RGB			
BL001-G3A302	4.8W	320lm	2700K~6500K	38°	φ70mm	φ86x47mm
BL001-G3A305			2700K~6500K+RGB			

SMART DOWN LIGHT-D1701

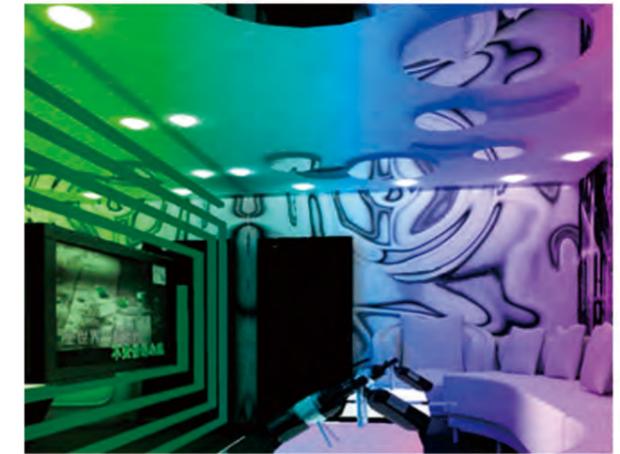


Application

Home, Bar, Coffee shop, KTV, Hotels, Party etc.

Features

- Smart Life APP control, no gateway required
- Dim, CCT, RGBCW function optional
- 16+ million colors in RGB mode
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- Colors change with music



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
WL001-D1702	15W	1350lm	2700K~6500K	100°	φ150mm	φ170x48mm
WL001-D1705			2700K~6500K+RGB			
BL001-D1702	15W	1350lm	2700K~6500K	100°	φ150mm	φ170x48mm
BL001-D1705			2700K~6500K+RGB			

SMART CEILING LIGHT




Application

Bedroom, Livingroom, Corridor, Aisle, Circulation area



Features

- Plastic frame with wood, white and black finishing. Unique colors clashing design is available
- PMMA diffuser, light transmittance is up to 80%
- 25000 hours lifespan, high lighting efficiency 90lm/w
- CE, RoHS and new ERP 2019/2015 compliant
- WiFi function is optional



Model	Wattage	Lumen	Efficacy	CCT	Beam	Dimensions
WCL002-300	21W	2100lm	100lm/W	2700K-6000K	100°	φ300x50mm
BCL002-300						

SMART CEILING LIGHT



Application

Corridor, Aisle, Circulation area

Features

- Adjustable buckle cut size φ 50-260mm
- Dimming , non-dimming, multi-power optional
- Black, silver, chrome and brushed nickel bezel optional
- Slim body height 22mm

Cut Out

For φ50mm-φ260mm cut hole




Ultra-slim

The ultra-slim design satisfies a narrow space with more elegance



Color of Bezels optional



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
WPDL001-818D	15W	1300lm	2700K-6500K+RGB	110°	φ65-185mm	φ217x22mm
WPDL001-1121D	18W	1700lm				φ290x22mm

SMART CEILING LIGHT



Surface-mounted



Pendant (with long pole)



Pendant (with metal wire)




Application

Home, Office, Hotel, Gym reception room, Classroom, Restaurant

Features

- Narrow trim design
- White and black are available
- 2 installation : Surface-mounted and pendant
- 5 years warranty



Model	Wattage	Lumen	CCT	Efficacy	Beam	Dimensions
CL003-W11	15W	1500lm	2700K-6000K	100lm/W	120°	φ300x80mm
CL003-W15	25W	2000lm				φ480x80mm
CL003-W24	50W	4000lm				φ600x80mm
CL003-B11	15W	1500lm	2700K-6000K	100lm/W	120°	φ300x80mm
CL003-B15	25W	2000lm				φ480x80mm
CL003-B24	50W	4000lm				φ600x80mm

SMART CEILING LIGHT



White



Black



Application

Home, Office, Hotel, Gym reception room, Classroom, Restaurant

Features

- Narrow trim design
- White and black are available
- 2 installation : Surface-mounted and pendant
- UGR 19
- 5 years warranty


Ultra-slim

Ultra-slim design for narrow space



2 installations

Surface-mounted and pendant



Model	Wattage	Lumen	CCT	Beam	Finish	Dimensions
CL004-W12	15W	1500lm	2700K-6000K	120°	Black/White	φ300x551mm
CL004-W16	25W	2000lm				φ480x551mm
CL004-W24	40W	4000lm				φ600x551mm
CL004-B12	15W	1500lm	2700K-6000K	120°	Black/White	φ300x551mm
CL004-B16	25W	2000lm				φ480x551mm
CL004-B24	40W	4000lm				φ600x551mm

SMART FIRE RATED DOWNLIGHT



Features

- Smart Life APP control, no gateway required
- Dim and CCT
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- 90 min anti-fire test

Fire-rated

Pass 90min anti-fire test



Quick install


Screw free
Loop in loop out



Application


Home, Hotels

Color of Bezels optional



Model	Wattage	Lumen	CCT	Beam	Cut hole	Dimensions
WL001-FG3A03	8.5W	700lm	3000K~6500K	60°	φ70mm	φ88x65mm
BL001-FG3A03						

SMART 360° FIRE RATED DOWNLIGHT

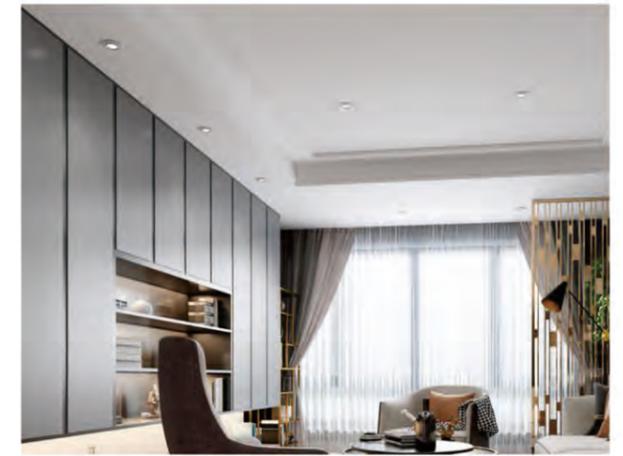

Features

- Smart Life APP control, no gateway required
- Dim and CCT , 360° rotation
- Work with Amazon Alexa, Google Assistant
- Timing reminder function
- 90 min anti-fire test
- Tooling free design

Fire-rated

Pass 90min anti-fire test



360° Rotation

30° tiltable at all directions



Quick install


Screw free
Loop in loop out



Application

Home, Hotels

Three color finishing optional



Model	Wattage	Lumen	CCT	Beam	Finish	Cut hole	Dimensions
WL001-D36A03	8.5W	720lm	3000K-6500K	38°	Black/White/Silver	φ85mm	φ96x40mm
BL001-D36A03							